

1 **TITLE:**

2 **Relationships between rainfall intensity, duration and suspended particle washoff from**  
3 **an urban road surface**

4

5

6

7 **AUTHORS:** Ian M. Brodie and Prasanna Egodawatta

8

9

10 **ADDRESS:**

11 **Ian .M. Brodie (Corresponding Author)**

12 Faculty of Engineering and Surveying and Australian Centre for Sustainable Catchments,  
13 University of Southern Queensland,  
14 West Street, Toowoomba, Queensland 4350, Australia

15 Email: [brodiei@usq.edu.au](mailto:brodiei@usq.edu.au)

16 Phone: +61 7 46312519

17 Fax: +61 7 46312526

18

19

20 **Prasanna Egodawatta**

21 School of Urban Development  
22 Queensland University of Technology  
23 GPO Box 2434, Brisbane 4001, Australia

24 Email: [p.egodawatta@qut.edu.au](mailto:p.egodawatta@qut.edu.au)

25 Phone: +61 (0)7 313 84396

26 Fax: +61 (0)7 313 81170

27

28

1 **Abstract**

2 A basic understanding of the relationships between rainfall intensity, duration of rainfall and  
3 the amount of suspended particles in stormwater runoff generated from road surfaces has  
4 been gained mainly from past washoff experiments using rainfall simulators. Simulated  
5 rainfall was generally applied at constant intensities, whereas rainfall temporal patterns  
6 during actual storms are typically highly variable. This paper discusses a rationale for the  
7 application of the constant-intensity washoff concepts to actual storm event runoff. The  
8 rationale is tested using suspended particle load data collected at a road site located in  
9 Toowoomba, Australia. Agreement between the washoff concepts and measured data is most  
10 consistent for intermediate-duration storms (duration <5hrs and >1hr). Particle loads resulting  
11 from these storm events increase linearly with average rainfall intensity. Above a threshold  
12 intensity, there is evidence to suggest a constant or plateau particle load is reached. The  
13 inclusion of a peak discharge factor (maximum 6-minute rainfall intensity) enhances the  
14 ability to predict particle loads.

15

16 **Key words:** Stormwater; road runoff; suspended solids; particle washoff; buildup-washoff

17

18 **Nomenclature**

19 A = load adjustment factor

20  $A_C$  = catchment area (ha)

21 ADWP = Antecedent Dry Weather Period

22 C= runoff coefficient

23 D = storm event rainfall duration (hr)

- 1  $D_{95}$  = limiting load time for 95% washoff (hr)
- 2 EMC = Event Mean Concentration
- 3  $I_C$  = constant rainfall intensity (mm/hr)
- 4  $I_{P1}, I_{P2}$  = average rainfall intensities (mm/hr) that define conditions for washoff of  $L_P$
- 5  $I_S$  = average storm event rainfall intensity (mm/hr)
- 6  $I_{tc}$  = rainfall intensity (mm/hr) corresponding to the time of concentration of the catchment
- 7  $I_x$  = maximum storm rainfall intensity (mm/hr) for a time period of x minutes
- 8 k = washoff coefficient (1/mm)
- 9  $L(t)$  = cumulative mass load ( $\text{mg}/\text{m}^2$ ) of suspended particles washed off after time t
- 10  $L_0$  = available particle load ( $\text{mg}/\text{m}^2$ ) washed from the surface
- 11  $L_P$  = plateau available particle load ( $\text{mg}/\text{m}^2$ )
- 12  $L_S$  = storm event load ( $\text{mg}/\text{m}^2$ )
- 13  $L_{T0}$  = pre-storm particle load ( $\text{mg}/\text{m}^2$ ) on the surface
- 14  $L_{133}$  = available particle load ( $\text{mg}/\text{m}^2$ ) for 133 mm/hr constant rainfall intensity
- 15 NCP = Non-Coarse Particle
- 16  $Q_P$  = peak discharge (L/s)
- 17 SE = Standard error
- 18 SSC = Suspended Sediment Concentration
- 19 TSS = Total Suspended Solids

20

## 21 **INTRODUCTION**

22 Suspended solids and other pollutants washed from roads during storms are a major cause of  
23 water quality degradation. Suspended solids is a significant pollutant in its own right and also

1 acts as a mobile substrate to other stormwater pollutants such as heavy metals, nutrients and  
2 hydrocarbons. Predicting the mass loading or concentration of suspended solids in road  
3 runoff is thus an important part of planning effective control strategies and a range of urban  
4 stormwater models such as SWMM (Huber and Dickensen, 1988), SLAMM (Pitt, 1998) and  
5 MOUSE (DHI, 2002) are available for this purpose.

6 Predictive modelling of suspended solids in road runoff requires an understanding of washoff  
7 responses to rainfall and this has been mainly gained from studies using rainfall simulators,  
8 notably the early work of Sartor and Boyd (1972). Simulator studies generally involve the  
9 collection and analysis of runoff samples from small-scale road plots under constant rates of  
10 artificial rainfall application. Rainfall intensity and duration are considered to be important  
11 hydrological factors in particle washoff based on the outcomes of Sartor and Boyd (1972)  
12 and subsequent rainfall simulator studies (Pitt, 1987; Vaze and Chiew, 2003; Egodawatta et  
13 al., 2007).

14 Although fundamental insights have been obtained by the use of rainfall simulator studies, a  
15 key question arises; how applicable are their findings obtained under controlled conditions to  
16 actual storm events which invariably do not have constant rainfall intensities? This question  
17 is addressed in this paper by first developing a rationale to describe how particle washoff  
18 relationships developed for constant simulated rainfalls could be applied to temporally  
19 variable storms. This rationale is then tested using road runoff data collected at a site in  
20 Toowoomba, Australia.

21 A key aspect of the analysis is to establish whether the particle washoff concepts established  
22 by simulator studies are apparent across the full range of monitored actual storms. For the  
23 washoff concepts to be transferable, an 'equivalent' rainfall intensity metric for actual storms

1 is required to substitute for the constant simulated rainfall intensity. Suspended solids loads  
2 measured from the Toowoomba road are grouped according to storm duration and plotted  
3 against various measures of rainfall intensity. Regression relationships are provided to  
4 describe the level of agreement with the measured loads and the expected simulator-based  
5 washoff responses. Improvements to the degree of fit are explored by incorporating  
6 additional rainfall characteristics within the regression.

7

## 8 **THEORY BASED ON SIMULATED RAINFALL STUDIES**

9 Previous investigations using simulated rainfall (Sartor and Boyd, 1972; Pitt, 1987;  
10 Egodawatta et al., 2007) demonstrated that particle loads washed from road surfaces during a  
11 test event under constant rainfall intensity can be described by the exponential relationship:

12

$$13 \quad L(t) = L_0 (1 - e^{-kI_C t}) \quad [1]$$

14

15 Where  $L(t)$  = cumulative mass load of suspended particles washed off after time  $t$  during the  
16 test,  $L_0$  = 'initial' or 'available' mass load washed from the surface,  $k$  = washoff coefficient  
17 and  $I_C$  = constant rainfall intensity. Various units of measurement have been adopted in past  
18 studies. In this paper, the following units are used:  $\text{mg}/\text{m}^2$  for loads,  $1/\text{mm}$  for  $k$ , and  $\text{mm}/\text{hr}$   
19 for rainfall intensity.

20 The washoff coefficient  $k$  is a key parameter dictating the temporal rate of particle washoff  
21 during a storm. Early work adopted a near-arbitrary  $k$  value of 0.18, on the assumption that  
22 90% of particles are removed by the first "half an inch" of runoff (Metcalf and Eddy Inc. et  
23 al., 1971). Sartor and Boyd (1972) found that  $k$  was independent of rainfall intensity and

1 particle size, but varied slightly according to street texture and condition. However, as noted  
2 by Millar (1999), the value of  $k$  has been shown to vary depending on rainfall intensity and  
3 catchment area (Sonnen, 1980) and catchment slope (Nakamura, 1984).

4

5 The ‘available’ load  $L_0$  is a critical, but very misunderstood parameter in the particle washoff  
6 equation. It was recognised by the early work of Sartor and Boyd (1972) that  $L_0$  can be  
7 defined as the particle load (of a particular size) which “could ever be washed from the street  
8 surface by rain of intensity ‘ $r$ ’ even as time approaches infinity”. As described,  $L_0$  is typically  
9 not the total amount of particles present on the surface prior to commencement of rainfall but  
10 is dictated by rainfall characteristics, specifically those that govern the capacity to detach and  
11 transport particles.

12 This physical interpretation of  $L_0$  is supported by other rainfall simulator studies (Pitt, 1987;  
13 Vaze and Chiew, 2003) that found washoff loads usually represent only a relatively small  
14 proportion (in the 3 to 25% range) of the total pre-storm particle load present on road  
15 surfaces. Repeated flushing of an urban street using a rainfall simulator by Malmquist (1978)  
16 reached a similar conclusion. Alley and Smith (1981) also stated that the pre-storm  
17 measurement of surface particles by sweeping, vacuuming or flushing may not be directly  
18 related to the actual amount available for transport by storm runoff. As a result,  $L_0$  can be  
19 considered to be predominately a function of rainfall intensity  $I_C$ . Although an inter-  
20 relationship was not quantified, both Sartor and Boyd (1972) and Pitt (1987) recognised that  
21 higher intensities of applied rainfall produced greater ‘available’ loads.

22 Egodawatta et al. (2007) related  $L_0$  to  $I_C$  by introducing an adjustment factor (capacity factor  
23  $C_F$  in their paper) to adjust washoff loads predicted using Equation 1 to measurements

1 conducted at three street sites in the Gold Coast region, Australia. Their testing included  
2 rainfall intensities up to 133 mm/hr, corresponding to relatively infrequent events. The  
3 adjustment factor varies in accordance to three distinct ranges of rainfall intensity as  
4 described by Equation 2.

$$L_0 = A \cdot L_{T0} = A \cdot L_{133} \quad [2]$$

5  
6  
7  
8 For  $I_C < 40$  mm/hr, A varies linearly from 0 to 0.5; for  $40 < I_C < 90$  mm/hr,  $A = 0.5$  and for  
9  $90 < I_C < 133$  mm/hr, A varies linearly from 0.5 to 1,  $L_{133}$  is the available washoff load for 133  
10 mm/hr constant rainfall intensity. Equation 2 is a reinterpretation of Egodawatta et al. (2007)  
11 who related A with the pre-test particle mass on the street surface as collected by vacuum  
12 cleaning ( $L_{T0}$ ), but demonstrated that this load was fully washed from the surface at the  
13 relatively high 133 mm/hr rainfall intensity.

14 Broad statements can be made in relation to particle washoff based on the cited rainfall  
15 simulator studies. In regard to this, a generalised set of particle washoff curves for a series of  
16 hypothetical events of increasing rainfall intensity is presented as Figure 1. For discussion  
17 purposes, the findings of Egodawatta, et al. (2007) were used to prepare the washoff curves.  
18 During each event, the applied rainfall intensity is constant. From the form of the washoff  
19 curves, it is evident that for a given constant rainfall intensity, the washoff load  
20 asymptotically approaches an upper limit (equal to the available load  $L_0$  in Equation 1).  
21 Generally the available load increases with rainfall intensity, but in some conditions  
22 ( $40 < I_C < 90$  mm/hr) this may not be the case and the upper limit is relatively constant, as  
23 illustrated by the  $I_3$  and  $I_4$  washoff curves in Figure 1.

1 It is also clear from Figure 1 that the duration of rainfall application required for the available  
2 washoff load to be reached varies depending on the rainfall intensity. This elapsed period of  
3 time is termed the ‘limiting load time’ in this paper. Due to the asymptotic nature of the  
4 washoff curves, the limiting load time can be approximated by the time to achieve 95%  
5 washoff ( $D_{95}$ ). A  $L(t)/L_0$  ratio of 0.95 was substituted into Equation 1 in order to derive the  
6 equation for  $D_{95}$  (Equation 3). A generalised form of the  $D_{95}$  curve is overlaid onto Figure 1.  
7 As seen in Figure 1, higher rainfall intensity leads to shorter limiting load times (and higher  
8 available washoff loads). The time also depends on the magnitude of the washoff coefficient  
9  $k$ , and decreases as  $k$  increases.

$$11 \quad D_{95} = -\ln(0.05) / (k I_C) \quad [3]$$

12 where  $D_{95}$  = limiting load time (hrs)

13  
14 The  $D_{95}$  curve provides a basis to determine the particle mass washed from a street surface  
15 for an event of constant rainfall intensity. Providing the rainfall duration exceeds  $D_{95}$  then,  
16 by definition, the event load is simply approximately equal to the available washoff load, as  
17 expressed by Equation 4. If these rainfall duration conditions are met, then the storm event  
18 load  $L_S$  is expected to follow the generalised relationship illustrated by Figure 2 (which is  
19 based on Equation 2).

$$21 \quad \text{For } D > D_{95}, L_S \approx L_0 \quad [4]$$

22 where  $D$  is the storm duration and  $L_S$  is the storm event load ( $\text{mg}/\text{m}^2$ ).  $L_0$  is a function of  
23 constant rainfall intensity  $I_C$  (e.g. of the form given by Equation 2).



1

2 A characteristic feature of the relationship between storm event load  $L_S$  and constant rainfall  
3 intensity  $I_C$  (Figure 2) is that, under certain conditions, the available washoff load is constant.  
4 In this paper, this load is termed the ‘plateau’ load  $L_P$  and occurs within the rainfall intensity  
5 range from  $I_{P1}$  to  $I_{P2}$ . Based on tests conducted by Egodawatta, et al. (2007),  $I_{P1}= 40$  mm/hr,  
6  $I_{P2}=90$  mm/hr and the plateau load  $L_P$  varied for each of the three street sites and ranged from  
7 1550 to 5400 mg/m<sup>2</sup> (calculated from data provided) .  $L_P$  is used as a point of reference in  
8 this paper to define particle washoff behaviour from road surfaces.

9

## 10 **MATERIALS AND METHODS**

### 11 **Rationale for the application of washoff relationships to actual storm conditions**

12 The generalized relationships (Figures 1 and 2, as well as Equations 1 to 4) encapsulate the  
13 particle washoff responses established from the cited rainfall simulator investigations.

14 Compared to simulations, which are generally set at a constant intensity, the intensity of  
15 actual storm rainfall exhibits significant temporal variability. An approach is required to  
16 enable a comparison between the non-uniform rainfall pattern of storms and the constant  
17 conditions under which the characteristic washoff curves were derived. The approach taken  
18 in this paper involves the following logic:

19

- 20 1) If the storm duration is sufficiently long (i.e.  $D > D_{95}$ ) , a time period of rainfall has  
21 occurred such that an available washoff load is reached
- 22 2) It is assumed that there is a rainfall intensity metric that provides an ‘equivalent’  
23 washoff response to  $I_C$  (described by Equation 2) conceptualised from the simulator

1 studies. In this study, rainfall intensity averaged over a fixed time period and over the  
2 storm duration are trialled.

3 3) By definition, under the above conditions, the event load in response to the storm  
4 matches the available washoff load  $L_0$  and can be determined by Equation 4.

5 4) If the storm duration is relatively short (i.e.  $D < D_{95}$ ), the time period of rainfall is not  
6 sufficient to attain conditions that yield an available washoff load limit and the  
7 resulting event load is of a lesser magnitude.

8 The rationale for adapting the simulator-based washoff curves to actual storms is tested based  
9 on whole-of-event particle loads for various storms, rather than the washoff response during  
10 individual storms. This is because the measured data involved event mean concentrations  
11 (EMC) only. A major objective of the data analysis is to establish the form of the relationship  
12 between the 'equivalent' rainfall intensity and event particle loads and to determine if it is  
13 consistent with that conceptualised from previous rainfall simulator studies.

#### 14 **Measured road runoff data**

15 Runoff samples were collected from a 75m long section of bitumen road pavement located at  
16 Toowoomba, Australia. A flow splitter device described by Brodie (2005) was used to obtain  
17 flow-weighted composite samples in response to 32 storms during the period December 2004  
18 to January 2006. No discrete samples were taken to quantify within-storm responses to  
19 rainfall, as the main purpose of the monitoring was to collect time-integrated event data.

20 Rainfall was recorded by a 0.25mm tipping bucket pluviometer installed near the sampling  
21 site. Event rainfalls varied from 2.5mm to 64.25mm at average intensities ranging from

22 1mm/hr to 40mm/hr. Event rainfall statistics are provided in Table 1. The road drainage area

1 occupies 450m<sup>2</sup> and the average daily traffic count was 3500 vehicles/day. A full description  
2 of the monitoring program is provided by Brodie and Porter (2006).

3 Runoff samples were analysed using a modified Suspended Sediment Concentration (SSC)  
4 method (ASTM, 2002) to determine the EMC of particles less than 500µm in size. An  
5 additional screening step was used to obtain <500µm particles, referred to as Non-Coarse  
6 Particles (NCP) to distinguish from SSC and the more commonly used Total Suspended  
7 Solids (TSS).

## 8 **RESULTS AND DISCUSSION**

### 9 **Equivalent rainfall intensity**

10 It is assumed that there is an ‘equivalent’ rainfall intensity for actual storms that substitutes  
11 for the constant rainfall intensity  $I_C$  utilised in the simulator-based washoff relationships.

12 Two basic forms of rainfall intensity were investigated; the maximum intensity averaged  
13 over a fixed time period during the storm and the event average rainfall intensity (total  
14 rainfall depth/storm duration).

15 Rainfall intensity based on a fixed time period was firstly explored. Guidance on the  
16 selection of an appropriate time period was obtained from past rainfall simulator studies of  
17 street surfaces. The Sartor and Boyd (1972) tests were conducted at two intensities (5.1  
18 mm/hr and 20.3 mm/hr) on three surfaces (two asphalt and one concrete). Samples collected  
19 at 15 minute intervals during each 2¼ hour duration test showed that most of the particle  
20 washoff load occurred within the initial one hour period, or less. On this basis, two time  
21 periods (30 minutes and 60 minutes) were trialled to derive equivalent rainfall intensities.

22 Figure 3 shows NCP load plotted against the maximum 30-minute intensity ( $I_{30}$ ). The plot  
23 generated for the maximum 60-minute intensity (not presented) is similar to Figure 3..

1 It is clear from Figure 1 that the magnitude of  $D_{95}$  is variable and the selection of a fixed time  
2 period may not lead to consistent results across all monitored storms. The measured road  
3 NCP load plotted against the average rainfall intensity  $I_S$  for each storm event is provided as  
4 Figure 4. In this case, the time period used is the duration  $D$  of the storm event defined as the  
5 total period when rainfall exceeded a nominal 0.25 mm/hr. The durations of the monitored  
6 storms ranged from 0.2 hrs to 21.3 hrs.

7 The plotted data in Figures 3 and 4 are divided into three storm categories, corresponding to  
8 short duration events of less than 1 hour (labelled  $D < 1$ ), longer events exceeding 5 hours  
9 (labelled  $D > 5$ ) and intermediate duration events (labelled  $1 < D < 5$ ). As found by previous  
10 analysis of a partial set of the NCP data (Brodie, 2007), these storm categories led to distinct  
11 clustering of the plotted data into separable groups. The clusters are most evident in the NCP  
12 plot against average rainfall intensity  $I_S$  given in Figure 4.

13 Using  $I_S$  as a measure of equivalent intensity appears to be more appropriate than an intensity  
14 based on a fixed time period, as demonstrated by the greater amount of scatter in Figure 3.  
15 Average rainfall intensity is based on a rainfall duration that varies from event to event and,  
16 due to this variance, appears to provide a better representation of the required equivalent  
17 rainfall intensity compared to using a single fixed duration.

18 The relevance of the particle washoff concepts to each of the three storm groups monitored at  
19 Toowoomba is discussed in the following sections.

## 20 **Particle washoff for intermediate storms**

21 Compared to the other storm groups, a regression line shown on Figure 4 for NCP loads  
22 generated from intermediate  $1 < D < 5$  storms most closely resembles in form to the generalised  
23 linear relationship indicated by Figure 2, and appears to cover at least part of the range

1 associated with a 'plateau' washoff load  $L_P$ . Graphically, the NCP loads for  $1 < D < 5$  storms  
2 support the assumption that the rainfall durations are sufficiently long to produce washoff of  
3 an available load.

4

5 The regression line relating storm event NCP load  $L_S (=L_0)$  to average rainfall intensity is  
6 provided in Equation 5 ( $n=18$ ,  $R^2=0.922$ ,  $SE = 410 \text{ mg/m}^2$ ). For reasons outlined later in this  
7 paper, the  $D < 1$  data point coinciding with the relatively high rainfall intensity of 40 mm/hr is  
8 also included. The plateau washoff load  $L_P$  is used as a point of reference in Equation 5, in  
9 preference to other load measures such as the pre-storm particle load on the road surface  $L_{T0}$ .

10

$$11 \quad L_S=L_0 = A \cdot L_P \quad [5]$$

12 where  $A= 0.091 I_S$  for  $I_S < 11 \text{ mm/hr}$ ,  $A=1$  for  $I_S > 11 \text{ mm/hr}$  and  $L_P= 4300 \text{ mg/m}^2$ . This  
13 relationship is applicable for  $1 < D < 5$  class of storm events and  $I_S \leq 40 \text{ mm/hr}$ .

14

15 The generation of the plateau washoff load  $L_P$  corresponds to 11 mm/hr (i.e.  $I_{P1}=11 \text{ mm/hr}$ ).

16 An upper rainfall intensity limit for  $L_P$  is not evident in the NCP load data, as the intensities  
17 of the monitored storms are moderate compared to the expected  $I_{P2}$  magnitude of 90 mm/hr.

18 The  $I_{P1}$  of 11 mm/hr is significantly less than the 40 mm/hr determined by Egodawatta, et al.  
19 (2007), and exceeds the average rainfall intensity of 7 mm/hr at which rainfall will cause

20 'cleansing' of a road surface based on measured data at Sydney, Australia (Ball, 2000).

21 Interestingly, the  $I_{P1}$  of 11 mm/hr is more consistent with the 12.7 mm/hr contained within  
22 the often-used default assumption that "90% of pollutants will be washed off in one hour for  
23 a 0.5 in/hr (12.7 mm/hr) runoff rate" (Jewell and Adrian, 1978).

1 **Particle washoff for short storms**

2 As shown in Figure 4, the NCP loads associated with the small number of observed short  
3 duration storms ( $D < 1$ ) are generally less in magnitude than the available washoff loads  
4 defined by the  $1 < D < 5$  regression line (Equation 5). This is consistent with the rationale  
5 given earlier in this paper, providing it can be demonstrated that  $D$  is less than  $D_{95}$  for these  
6 individual storms. Under conditions of incomplete washoff of the available load, Equation 4  
7 is not applicable, but an estimate of the storm event load  $L_S$  can be made based on the  
8 underlying exponential washoff equation (Equation 1). This provides an opportunity to  
9 derive estimates of the washoff coefficient  $k$ , as for  $D < D_{95}$ ;

10

11  $L_S = L_0 (1 - e^{-kI_S D})$  [6]

12 where  $L_0$  = available NCP washoff load based on Equation 5. This relationship is applicable  
13 for  $I_S \leq 40$  mm/hr, corresponding to the measured range of storms under analysis.

14 The procedure to derive the  $k$ -values involves first estimating the available washoff load  $L_0$   
15 from Equation 5, using the average rainfall intensity  $I_S$  for the storm event. As the storm  
16 duration  $D$  is also known, the  $k$ -value can be estimated by iterating Equation 6 so the  
17 predicted load matches the measured load. A check was then made to determine if the storm  
18 duration  $D$  is less than  $D_{95}$  as determined from Equation 3.

19 Although the number of  $D < 1$  class storms is limited, the variation in  $k$ -values shows some  
20 indicative trends. For the cluster of three storms corresponding to rainfall intensities less than  
21 12 mm/hr (as plotted in Figure 4), the calculated  $k$ -values ranges from 0.039 to 0.085 (mean  
22 0.06). Storm duration  $D$  is less than  $D_{95}$  for all of these events, consistent with the underlying  
23 assumption of incomplete washoff. Their washoff coefficients are an order of magnitude less

1 than the k-value ( $k=0.40$ ) associated with the single, higher intensity storm ( $I_S=40$  mm/hr).  
2 Although this storm is very short ( $D=0.2$  hrs), the duration of rainfall matches the limiting  
3 load time ( $D_{95}=0.19$  hrs, calculated from Equation 3) suggesting that complete washoff of the  
4 available load is achieved by this event. Furthermore, the plotting position of this event on  
5 Figure 4 coincides with the 'plateau' washoff load  $L_P$ . This result points to this particular  
6 storm event being also closely allied with the  $1 < D < 5$  class of storms and was included in the  
7 Equation 5 regression.

8 The large range in k-values across the four monitored storms (0.039-0.40) is comparable with  
9 analysis by Alley (1981) of suspended solids data collected from a 5.95 ha urban catchment  
10 in Florida, USA. By using an optimisation technique, k-values for eight storms varied from  
11 0.036 to 0.43. Individual storm durations were not reported. Pitt (1987) derived a similar  
12 range (0.078-0.38) of k-values based on rainfall simulator testing of various road surfaces  
13 located in Toronto, Canada. All tests were conducted over a 2 hour period, with rainfall  
14 application ranging from 5 to 25mm.

15 Although not definitive due to the limited data, a linear relationship provided as Equation 7 is  
16 apparent ( $n=4$ ,  $R^2=0.995$ ,  $SE=100$  mg/m<sup>2</sup>) for the  $D < 1$  storm class.

17

$$18 \quad L_S = 108 I_S - 190 \quad [7]$$

19 This relationship is applicable for  $D < 1$  class of storm events and  $I_S \leq 40$  mm/hr, corresponding  
20 to the measured range of storms under analysis.

21

22 Rainfall depth for the  $D < 1$  storm class ranges from 2.5 to 8mm. Other studies have identified  
23 a linear response of particle load to various hydrological parameters in the specific case of

1 relatively minor rainfall events. Berretta et al. (2007) found that TSS loads generated from  
2 two urban sites in Genoa, Italy were in linear proportion to the cumulative runoff volume for  
3 low-intensity storms less than 5mm rainfall. This class of storms were referred to as ‘flow-  
4 limited low runoff volume’ events, as used previously by Sansalone et al. (1998) in their  
5 study of highway runoff at Cincinnati, Ohio who also observed a linear response. A linear  
6 response is also consistent with Alley (1981) who demonstrated that, for a given k-value, the  
7 curvature of the load characteristics curves decreases as the total storm runoff decreases  
8 towards minor rainfalls of a few mm. This tendency is also evident in the shape of the  
9 generalized washoff curves shown in Figure 1.

#### 10 **Particle washoff for long storms**

11 For longer duration storms ( $D > 5$ ), the NCP loads are higher than the available loads, defined  
12 by the  $1 < D < 5$  data in Figure 4, and thus an ‘additional’ particle source is associated with  
13 these rainfall events. Possible mechanisms for this within-storm particle contribution is  
14 attributed to vehicle traffic, and include enhanced particle mobilisation due to the pumping  
15 action of tyres in contact with wet road surfaces, dislodgment of particles from vehicles by  
16 water spray and wet-deposition of exhaust particles (Gupta, et al., 1981). Past road runoff  
17 studies have also identified that traffic-induced particle loads can be significant during  
18 prolonged wet weather, more so with heavy traffic conditions during the event (Asplund, et  
19 al., 1982; Sansalone et al., 1998; Kim, 2002).

20 Many of the  $D > 5$  storms have successive bursts of rainfall separated by periods of low  
21 rainfall, and a typical example is shown in the hyetograph given in Figure 5. It is expected  
22 that in such a multi-burst storm, washoff occurs due to the initial rainfall burst but particles  
23 are progressively replenished by traffic during the subsequent period of low to no rainfall.



1 The second rainfall burst washes off some of the replenished store of particles on the wet  
2 road surface. A cycle of particle removal and replenishment provides an explanation for the  
3 ‘additional’ particle source for the D>5 storms.

4 A regression function ( $n=11$ ,  $R^2=0.27$ ,  $SE=2160 \text{ mg/m}^2$ ) fitted to the D>5 storm data is given  
5 as Equation 8. The low coefficient of determination suggests that contributing factors other  
6 than average rainfall intensity (such as traffic variables) are important for the D>5 storm  
7 class.

8

$$9 \quad L_S = 943 I_S \quad [8]$$

10 This relationship is applicable for D>5 class of storm events and  $I_S \leq 10 \text{ mm/hr}$ , corresponding  
11 to the measured range of storms under analysis.

### 12 **Inclusion of a peak discharge factor for intermediate storms**

13 Data for the intermediate ( $1 < D < 5 \text{ hr}$ ) storms provides the best explanatory fit to the particle  
14 washoff rationale previously described in this paper. The inclusion of hydrological factors  
15 other than average rainfall intensity may further enhance the ability to predict particle loads  
16 generated during these storms, as discussed herein.

17 Rainfall intensity is a variable in the exponential washoff relationship (Equation 1) and is  
18 closely associated to the kinetic energy of raindrops (Van Dijk et al., 2002; Brodie and  
19 Rosewell, 2007) leading to the detachment of particles from surfaces. However, a companion  
20 process is the transport of particles to and along the street drain (usually in the form of a  
21 roadside gutter or kerb) by overland flow. Mobilisation of suspended particles from the street  
22 surface to a point of discharge has thus been conceptualized as a two-step process; particle

1 detachment and washoff by rainfall from the surface followed by a transport phase by  
2 overland flow (Price and Mance, 1978; Deletic et al., 1997).  
3 Overland flow processes have been accounted for in predictive models based on parameters  
4 such as flow depth (Sriananthakumar and Codner, 1995), shear stress (Akan, 1987) and  
5 runoff rate (Pope et al., 1978; Ichikawa, 1981). Given this recognition in previous studies, the  
6 benefit of including a factor in addition to  $I_5$  to specifically represent peak overland flow  
7 conditions was considered for the  $1 < D < 5$  class of storms.

8 Peak overland flow in small urban areas can be estimated by the well-known Rational  
9 Method based on Equation 9, which links peak discharge to the rainfall intensity  
10 corresponding with the time of concentration of the catchment  $I_{tc}$ . As the time of  
11 concentration of the Toowoomba road site is approximately 6 minutes, the maximum 6-  
12 minute rainfall intensity ( $\text{Max } I_6$ ) provides a measure of peak overland discharge.

13

$$14 \quad Q_P = 0.00278 C I_{tc} A_C \quad [9]$$

15 where  $Q_P$  = peak discharge (L/s),  $C$  = runoff coefficient,  $I_{tc}$  = rainfall intensity corresponding  
16 to the time of concentration of the catchment and  $A_C$  = catchment area (ha).

17

18 In the case of the Toowoomba data, NCP loads are moderately correlated ( $n=18$ ,  $R^2=0.824$ ,  
19  $SE=580 \text{ mg/m}^2$ ) to  $\text{Max } I_6$  for the  $1 < D < 5$  class of storms as shown in Figure 6. The  
20 regression relationship is provided as Equation 10.

21

$$22 \quad L_S = 109 \text{ Max } I_6 - 690 \quad [10]$$

1 This relationship is applicable for  $1 < D < 5$  class of storm events and  $\text{Max } I_6 < 50$  mm/hr,  
2 corresponding to the measured range of storms under analysis.

3

4 NCP loads plotted against  $I_S \cdot \text{Max } I_6$  are presented in Figure 7. For the  $1 < D < 5$  class of storms,  
5 there appears to be ‘initial’ amount of NCP load that is washed from the road surface at  
6 comparatively low values of  $I_S \cdot \text{Max } I_6$ . As a result, a compound linear relationship was fitted  
7 to the data as given by Equation 11. The ‘initial’ load, representing approximately 30% of the  
8 plateau load  $L_P$ , is associated with an  $I_S \cdot \text{Max } I_6$  value that is less than 10 % of the  
9 corresponding value required for plateau load washoff.

10

$$11 \quad L_S = A \cdot L_P \quad [11]$$

12 where A varies linearly from 0 to 0.29 for  $I_S \cdot \text{Max } I_6 < 40$ ; A varies from 0.29 to 1 for  $40 <$   
13  $I_S \cdot \text{Max } I_6 < 450$ , and  $A = 1$  for  $I_S \cdot \text{Max } I_6 > 450$ , and  $L_P = 4300 \text{ mg/m}^2$ . This relationship is  
14 applicable for  $1 < D < 5$  class of storm events and  $I_S \cdot \text{Max } I_6 < 1700 \text{ mm}^2/\text{hr}^2$ .

15

16 The relationship for  $1 < D < 5$  storms (Equation 11) suggests the presence of two particle types;  
17 an ‘initial’ particle load that is readily washed off and transported, and particles that are not  
18 as easily mobilised. This partitioning of particles according to energy requirements for  
19 washoff and transport is analogous to the ‘free’ and ‘fixed’ particles described by Vaze and  
20 Chiew (2002) on the basis of the increasing energy required for their physical removal from a  
21 street surface in dry weather. Murakami et al. (2004) also considered that road particles can  
22 be classified into highly and less mobile fractions. Their distinction between particles was not  
23 based on physical properties including size, as both types were classed as fine ( $< 45 \mu\text{m}$ ).

1 The correlation statistics for Equation 11 ( $n=18$ ,  $R^2=0.970$ ,  $SE=250 \text{ mg/m}^2$ ) indicate that  
2 using  $I_S \cdot \text{Max } I_6$  provides a more accurate predictor of NCP load for  $1 < D < 5$  storms than the  
3 use of  $I_S$  alone. Standard error of NCP estimates is reduced from  $410 \text{ mg/m}^2$  to  $250 \text{ mg/m}^2$   
4 (or 6% of the plateau load  $L_P$ ).

## 6 **CONCLUSIONS**

7 Knowledge of particle washoff from roads gained by rainfall simulator tests under constant  
8 intensity is transferable to the more variable conditions of actual storms. Based on the Non-  
9 Coarse Particle (NCP,  $< 500 \mu\text{m}$ ) loads measured at the Toowoomba road site, in conclusion:  
10 1) A key concept is the available load  $L_0$  which is the particle mass washed from the road  
11 surface in response to a sustained time period of rainfall. Available load varies with the  
12 intensity of rainfall, but a minimum duration of rainfall is also required to generate full  
13 washoff of the available load. This limiting load time  $D_{95}$  is also dependent on rainfall  
14 intensity (and washoff coefficient  $k$ ). Due to this interdependency between rainfall intensity,  
15 limiting load time and available load, the average rainfall intensity of a storm event  $I_S$   
16 appears to be more suitable than a fixed-duration intensity in the determination of available  
17 loads.  
18 2) Available load increases linearly with average rainfall intensity  $I_S$  until a plateau load  $L_P$  is  
19 reached for rainfalls above threshold intensity  $I_{P1}$ . For road runoff measured at the  
20 Toowoomba site, the conditions that lead to complete washoff of the available load are  
21 associated with intermediate duration events ( $1 < D < 5$ ).  
22 3) For short storms ( $D < 1$ ), the duration of rainfall may be less than the required limiting load  
23 time  $D_{95}$  resulting in incomplete washoff of the available load. However, as  $D_{95}$  reduces with

1 increased rainfall intensity, some short storms of sufficient intensity may produce complete  
2 washoff conditions.

3 4) For longer duration storms ( $D > 5$ ), measured NCP loads exceed the available load  
4 indicating an additional particle contribution is associated with these events. This within-  
5 storm contribution is attributed to vehicle traffic, with particle accumulation occurring in  
6 periods of low to no rainfall and subsequently washed off by later rainfall bursts. More  
7 research is required to fully quantify traffic-induced particle effects during  $D > 5$  storms.

8 5) The inclusion of a peak discharge factor ( $\text{Max } I_6$ ) enhances the ability to predict NCP  
9 loads for intermediate  $1 < D < 5$  storms. This is consistent with the dual processes that govern  
10 particle washoff, which are the detachment of particles from the surface by rainfall kinetic  
11 energy (represented by  $I_5$ ) and particle transport by overland flow (represented by  $\text{Max } I_6$ ).

12 The NCP load response to the rainfall index  $I_5 \cdot \text{Max } I_6$  suggests that particles in road runoff  
13 can be grouped either as an initial load that is easily washed off or as a less mobile particle  
14 mass that has a higher rainfall energy and flow transport requirement for washoff.

15 The analysis described in this paper provides evidence that particle washoff responses  
16 established by constant-intensity rainfall simulator studies are transferable to small road  
17 catchments under actual storms. Average storm event rainfall intensity appears to be an  
18 appropriate substitute for the constant simulated rainfall intensity. More work is required to  
19 test the generality of this outcome to other suspended solids measures (TSS and SSC),  
20 different urban surfaces and at larger catchment scales.

## 21 **REFERENCES**

22 Akan, A.O. 1987 Pollutant washoff by overland flow. *J. Environ. Eng.* **114**, 811-823.

23

1 Alley, W.M. 1981 Estimation of impervious-area washoff parameters. *Water Resources*  
2 *Research* **17**(4), 1161-1166.

3

4 Alley, W.M. and Smith, P.E. 1981 Estimation of accumulation parameters for urban runoff  
5 quality modeling. *Water Resources Research* **17**(6), 1657-1664.

6

7 American Society for Testing and Materials. 2002 *Standard Test Method for Determining*  
8 *Sediment Concentration in Water Samples*. ASTM Designation D3977-97 Reapproved 2002.

9

10 Asplund, R., Ferguson, J.F. and Mar, B.W. 1982 Total suspended solids in highway runoff in  
11 Washington State. *J. Enviro. Engineering* **108**, 391-404.

12

13 Ball, J.E. 2000 Runoff from road surfaces- How contaminated is it? *Proc. Hydro 2000, 3<sup>rd</sup>*  
14 *Inter. Hydrology and Water Resources Symposium of the Instit. Eng. Aust.*, Perth, Australia,  
15 259-264.

16

17 Berretta, C., Gnecco, I., Lanza, L.G. and La Barbera, P. 2007 Hydrologic influence on  
18 stormwater pollution at two urban monitoring sites. *Urban Water Journal* **4**(2), 107-117.

19

20 Brodie, I. 2005 Stormwater particles and their sampling using passive devices. *Proc. 10<sup>th</sup>*  
21 *Inter. Conf. on Urban Drainage*, 21-26 August 2005, Copenhagen, Denmark (CD-ROM).

22

1 Brodie, I and Porter, M. 2006 Stormwater particle characteristics of five different urban  
2 surfaces. *Proc. 7<sup>th</sup> Inter. Conf. on Urban Drainage Modelling in conjunction with 4<sup>th</sup> Inter.*  
3 *Conf. on Water Sensitive Urban Design*, 3-7 April 2006, Melbourne, Australia, V1.27-34.  
4

5 Brodie, I. 2007 Prediction of stormwater particle loads from impervious urban surfaces based  
6 on a Rainfall Detachment Index, *Water Science and Technology* **55** (4), 49-56.  
7

8 Brodie, I and Rosewell, C. 2007 Theoretical relationships between rainfall intensity and  
9 kinetic energy variants associated with stormwater particle washoff. *J. of Hydrology* **340**, 40-  
10 47.  
11

12 Deletic, A., Maksimovic, C. and Ivetic, M. 1997 Modelling of storm wash-off of suspended  
13 solids from impervious surfaces. *J. Hydraulic Research* 35, 99-118.  
14

15 DHI. 2002 *MOUSE Surface Runoff Model Reference Manual*. DHI Software, Horsolm,  
16 Denmark.  
17

18 Egodawatta, P., Thomas, E. and Goonetilleke, A. 2007 Mathematical interpretation of  
19 pollutant washoff from urban road surfaces using simulated rainfall. *Water Research* **41**,  
20 3025-3031.  
21

22 Gupta, M.K., Agnew, R.W. and Kobriger, N.P. 1981. *Constituents of Highway Runoff, Vol.*  
23 *I: State of the Art Report*. FHWA/RD-81/042, US Federal Highway Administration.

1 Huber, W.C. and Dickensen, R.E. 1988 *Stormwater Management Model (SWMM), Version*  
2 *4, Users Manual*, US EPA Report EPA/600/3-88/001a, Athens GA, USA.  
3  
4 Ichikawa, A. 1981 Estimation of non-point source loading. *Proc. 2<sup>nd</sup> Int. Conf. on Urban*  
5 *Storm Drainage*, Urbana, Illinois, USA, 585-586.  
6  
7 Jewell, T.K. and Adrian, D.D. 1978 SWMM stormwater pollutant washoff functions. *Proc.*  
8 *ASCE*, **104** (EE5), 1036-1040.  
9  
10 Kim, L., 2002. *Monitoring and Modeling of Pollutant Mass in Urban Runoff: Washoff,*  
11 *Buildup and Litter*. PhD thesis, University of California, USA.  
12  
13 Malmquist, P. 1978 Atmospheric fallout and street cleaning - Effects of urban stormwater  
14 and snow. *Prog. Wat. Tech.* **10**, 495-505.  
15  
16 Metcalf and Eddy Inc., University of Florida and Water Resources Engineers. 1971 *Storm*  
17 *Water Management Model. Volume 1: Final Report*. EPA Report DOC 07-71 (NTIS PB-  
18 203289), Environmental Protection Agency, Washington DC, USA.  
19  
20 Millar, R.G., 1999 Analytical determination of pollutant washoff parameters. *J. Enviro.*  
21 *Engineering* **125** (10), 989-992.  
22



- 1 Murakami, M., Nakajima, F. and Furumai, H. 2004 Modelling of runoff behaviour of  
2 particle-bound polycyclic aromatic hydrocarbons (PAHs) from roads and roofs. *Water*  
3 *Research* **38**, 4475-4483.
- 4
- 5 Nakamura, E. 1984 Factors affecting stormwater quality decay coefficient. *Proc. 3<sup>rd</sup> Int.*  
6 *Conf. on Urban Storm Drainage*. Goteborg, Sweden, 979-988.
- 7
- 8 Pitt, R.E. 1987 *Small Storm Urban Flow and Particulate Washoff Contributions to Outfall*  
9 *Discharges*. PhD thesis, University of Wisconsin-Madison, USA.
- 10
- 11 Pitt, R. 1998 Unique Features of the Source Loading and Management Model (SLAMM). In:  
12 James, W. (Ed.), *Modeling the Management of Stormwater Impacts, vol 6*. Computational  
13 Hydraulic International, Guelph, Ontario, 13-35.
- 14
- 15 Pope, W., Graham, N.J.D., Young, R.J. and Perry, R. 1978 Urban runoff from a road surface  
16 - A water quality study. *Prog. Wat. Tech.* **10**, 533-543.
- 17
- 18 Price, R.K. and Mance, G. 1978 A suspended solid model for stormwater runoff. *Proc. 1<sup>st</sup>*  
19 *Inter. Conf. on Urban Storm Drainage*, Southampton, UK, 546-555.
- 20
- 21 Sansalone J.J, Koran, J.M., Smithson, J.A. and Buchberger, S.G. 1998 Physical  
22 characteristics of urban roadway solids transported during rain events. *J. Environ.*  
23 *Engineering* **124**, 427-440.

1

2 Sartor, J.D. and Boyd, G.B. 1972 *Water Pollution Aspects of Street Surface Contaminants*.

3 US EPA Report EPA-R2-72-081, Office of Research and Monitoring, Washington DC, USA.

4

5 Sonnen, M.B. 1980 Urban runoff quality: Information needs. *J. Tech. Councils, ASCE* **106**

6 (1), 29-40.

7

8 Srianthakumar, K. and Codner, G.P. 1995 Urban storm pollutant load estimation using

9 overland flow depth. *Proc. 2<sup>nd</sup> Int. Symp. on Urban Stormwater Management*, Melbourne,

10 Australia, 1, 229-234.

11

12 Van Dijk, A.I.J.M., Bruijnzeel, L.A. and Rosewell, C.J. 2002 Rainfall intensity-kinetic

13 energy relationships: A critical appraisal. *J. of Hydrology* **261** (1-4), 1-23.

14

15 Vaze, J. and Chiew, F.H.S. 2002 Experimental study of pollutant accumulation on an urban


16 road surface. *Urban Water* **4**(4), 379-389.

17

18 Vaze, J. and Chiew, F.H.S. 2003 Study of pollutant washoff from small impervious

19 experimental plots. *Water Resources Research* **39**(6), 1160-1170.

20

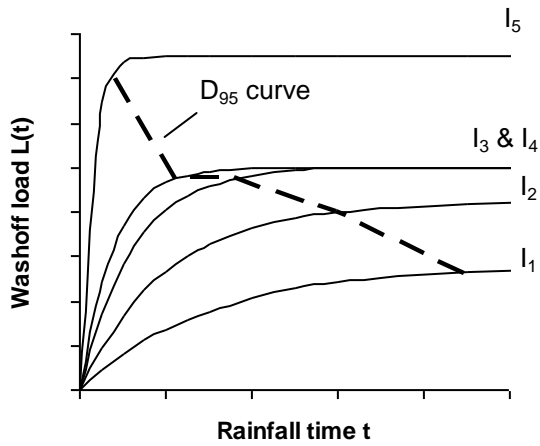


1

2 Figure 1: Generalised curves relating washoff load  $L(t)$  with rainfall time  $t$  for events of  
 3 increasing constant rainfall intensity, where  $I_1 < I_2 < I_3 < I_4 < I_5$ , based on Egadawatta, et al.  
 4 (2007). The dashed  $D_{95}$  curve represents the time at which 95% of the available load (or  
 5  $0.95L_0$ ) is attained.

6

7


1

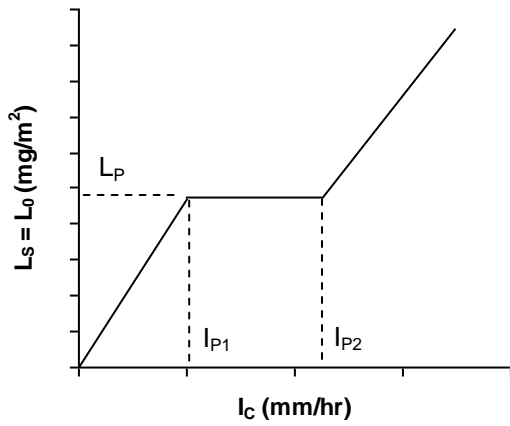

2

3 Figure 2: Generalised relationship based on Equation 2 between storm event load  $L_S$  and  
4 constant rainfall intensity  $I_C$ . This relationship is based on Egodawatta, et al. (2007) and  
5 applies if the duration of rainfall  $D$  exceeds  $D_{95}$ . The 'plateau' washoff load  $L_P$  coincides  
6 with rainfall intensity ranging from  $I_{P1}$  to  $I_{P2}$ .


7

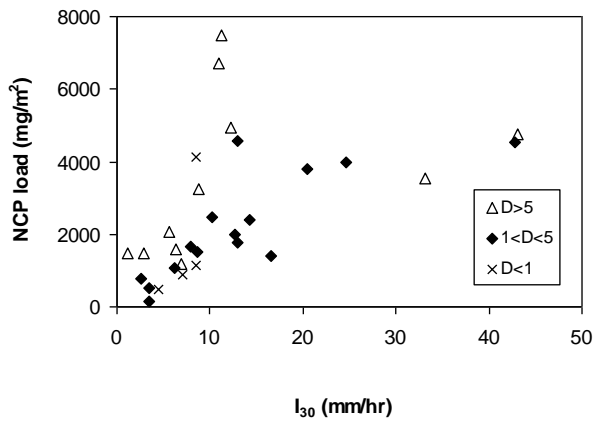

1

2 Figure 3: Plot of road NCP loads against storm maximum 30-minute rainfall intensity I<sub>30</sub>,  
 3 grouped by rainfall duration D

4

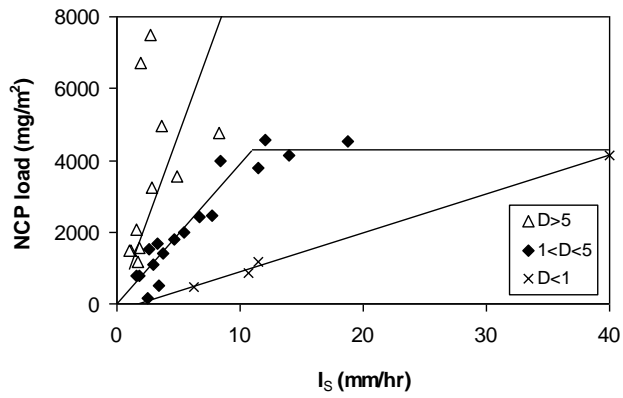


1

2 Figure 4: Plot of road NCP loads against storm event average rainfall intensity  $I_s$ , grouped

3 by rainfall duration  $D$ . Regressions for NCP loads for each storm class are also shown.

4

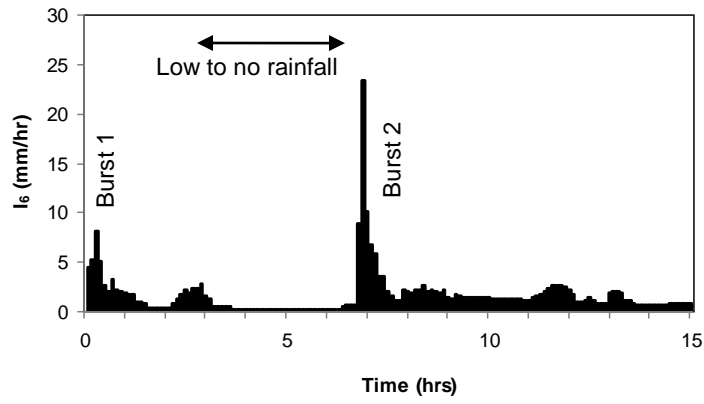


1

2 Figure 5: Hyetograph of 15 June 2005 storm showing two rainfall bursts with intervening  
3 period of low to no rainfall.

4

5

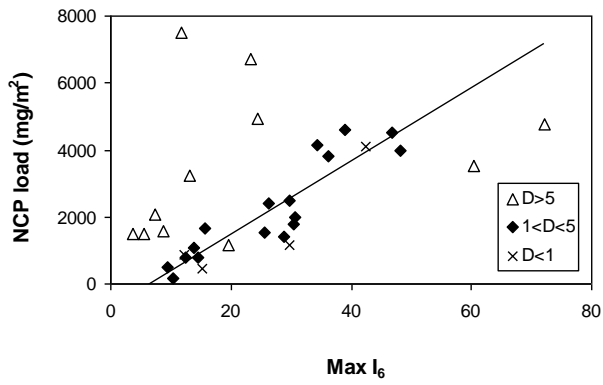


1

2 Figure 6: Plot of road NCP loads against maximum six-minute rainfall intensity (Max I<sub>6</sub>),  
 3 grouped by rainfall duration D. Regression for NCP loads for 1 < D < 5 storms is also shown.

4



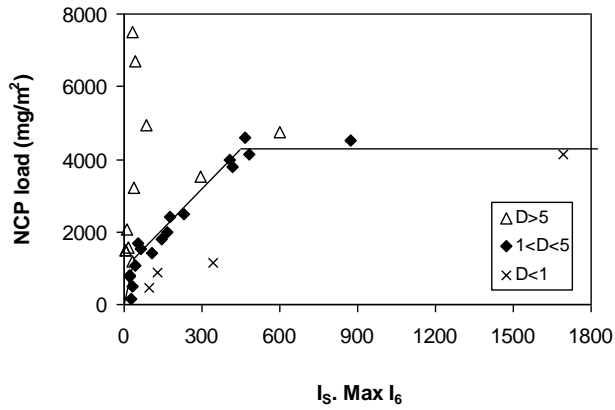

1

2 Figure 7: Plot of road NCP loads against product of average rainfall intensity and maximum  
 3 six-minute rainfall intensity (IS. Max I<sub>6</sub>), grouped by rainfall duration D. Regression for  
 4 NCP loads for 1 < D < 5 storms is also shown.