

MILD COMBUSTION: A TECHNICAL REVIEW TOWARDS OPEN FURNACE COMBUSTION

M.M. Noor^{1,3*}, Andrew P. Wandel¹ and T.F. Yusaf^{2,3}

¹Computational Engineering and Science Research Centre, Department of Mechanical and Mechatronic Engineering University of Southern Queensland (USQ),

²National Centre for Engineering in Agriculture, USQ, Australia

³Faculty of Mechanical Engineering, Universiti Malaysia Pahang (UMP), Malaysia

*Corresponding author email: Muhamad.MatNoor@usq.edu.au

ABSTRACT

Moderate or Intense Low oxygen Dilution (MILD) combustion is one of the best alternative new technologies for clean and efficient combustion. MILD combustion has been proven to be a promising combustion technology for industrial applications with decreased energy consumption due to the uniformity of temperature distribution, also producing low NO_x and CO emissions. This article provides a review and discussion of the recent research and development in MILD. Furthermore, the problems and focuses are summarized with some suggestions and therefore presented on upgrading an application of MILD in the future. Currently MILD combustion has been applied in closed furnace. For closed furnace, the preheating supply air is no longer required since the recirculation inside the enclosed furnace will self preheats the supply air and self dilutes the oxygen in the combustion chamber. The possibility of using open furnace MILD combustion was discussed and reviewed.

Keywords: MILD combustion, turbulent combustion, open furnace

INTRODUCTION

Chemical reaction through combustion still contributes to most of the energy needs. The demand of energy is dramatically increasing due to the growth of the world's population and substantial economic development in countries such as China and India. Some of the major challenges are to provide efficient energy and limit greenhouse-gas (GHG) emissions. Combustion of fossil fuel is projected to fulfil about 80% of these energy needs (IEA, 2009 and Maczulak, 2010). The pollution resulting from conventional combustion processes is linked with global warming and other associated changes such as abnormal weather patterns, rise in ocean levels and melting of ice the North and South Poles. The more efficient use of fuel with low GHGs emission as well as carbon capture and storage (CCS) might be effective ways to gradually reduce the GHG emissions (IEA, 2006, 2009 and Orr, 2005). IEA/OECD (2002) and Jonathan (2006) reported that CO₂ contributed 77% of the greenhouse gas emissions with combustion accounting for 27%, making it a major contributor to global climate change. To counter this issue, the improvement of combustion efficiency with lower emissions has led researchers to have more interest in new combustion technology and combustion modeling (Smith and Fox, 2007 and Merci et al., 2007). One of the methods to improve the combustion efficiency is to preheat the reactant by the hot flue gas. However, preheating the combustion air generally increases the flame temperature which results in

more formation of thermal NO_x . A new combustion technology has been suggested that is able to solve this issue: Moderate or Intense Low Oxygen Dilution (MILD) combustion produces high combustion efficiencies with very low emissions.

Combustion processes require three basic elements which are fuel, oxidiser and heat or an ignition source. Fuel and oxidiser need to be mixed at the molecular level via a turbulent mixing process. In 1989, Wüning (1991) observed a surprising phenomenon during experiments with a self-recuperative burner. At furnace temperatures of 1273K and about 923K air preheat temperature, no flame could be seen and no UV-signal could be detected. The fuel was completely burnt and the CO was below 1ppm in the exhaust. The NO_x emissions were almost zero with smooth and stable combustion. Wüning (1991) called that condition “flameless oxidation” or FLOX (Wüning, 1996, Wüning and Wüning, 1997 and Milani and Wüning, 2007). This new combustion technology was also labelled as Moderate or Intense Low-oxygen Dilution (MILD) combustion (Dally et al., 2002, Cavaliere and de Joannon, 2004). Katsuki and Hasegawa (1998) and Tsuji et al., (2003) found that high-temperature air combustion (HiTAC) is nearly the same as MILD combustion, besides operating at higher temperatures. MILD combustion has many beneficial features, especially on producing uniform temperature distribution, excellent combustion stability, very high efficiency and extremely low emissions of NO_x . The early research and development of MILD combustion came from Germany (Wüning and Wüning, 1997, Plessing et al., 1998, Mancini et al., 2002, 2007, Kim et al., 2008 and Zieba et al., 2010) and Japan (Katsuki and Hasegawa, 1998, Yuan and Naruse, 1999 and Tsuji et al., 2003). However all the combustion was studied for closed chamber or closed furnace.

Currently there is no record of studies for MILD combustion in open furnace. More understanding on flame structures are necessary to increase the application range of the MILD combustion (Medwell, 2007) especially on open furnace. Some histories, recent trends and researches on MILD were reviewed. The key topics discussed include MILD combustion regime, flame characteristics and properties, NO_x emissions. Some early results on the modelling of open furnace of MILD combustion were discussed at the end of this paper.

COMBUSTION REGIME

MILD combustion is greatly different from normal combustion mainly because of the low oxygen concentration and mixture temperature higher than the fuel autoignition point (Li et al., 2011b). Figure 1 indicates that the MILD combustion range for oxygen dilution is about 3-13% and the reactant temperature is above the auto ignition temperature.

The recirculation of hot flue gas to preheat the reactants and simultaneously diluted the oxygen was a key concept of MILD combustion (Tsuji et al., 2003). The maximum temperature increase due to the combustion is lower than the mixture self-ignition temperature (Cavaliere and de Joannon, 2004). Recent applications of MILD combustion have been into research and development of gas turbines (Duwig et al., 2008, Arghode and Gupta 2009, 2010a, 2010b, 2011a, 2011b) and gasification systems (Tang et al., 2010, 2011). This combustion mode can be very interesting in gas turbine applications due to low maximum temperatures (very close to the ones at the inlet of a

gas turbine), noiseless characteristics, good flame stability and effectiveness in reducing pollution emissions. In contrast, the problems related to large scale application of MILD gas turbines are the characteristic time related to the chemical process (the ignition delay time) and the preheating of the fresh reactants (ultralean, superdiluted, highly preheated). Based on the study and compilation by Li et al. (2011b), common MILD combustion appears to be summarised as:

- i. High temperature pre-heat of air and high-speed injections of air and fuel are the main requirements of achieving MILD combustion;
- ii. Strong entrainments of high-temperature exhaust gases, which dilute fuel and air jets, are the key technology of maintaining MILD combustion;
- iii. Important environmental conditions for the establishment of MILD combustion: local oxygen concentration is less than 5%-10% while local temperature is greater than that for fuel self-ignition in the reaction zone. These must be achieved by strong dilution of reactants with the flue gas (N_2 and CO_2 -rich exhaust gas);
- iv. When using the regenerator to recycle the waste heat of flue gases, the thermal efficiency of MILD combustion can increase by 30%, while reducing NO_x emissions by 50% (Tsuji et al., 2003).

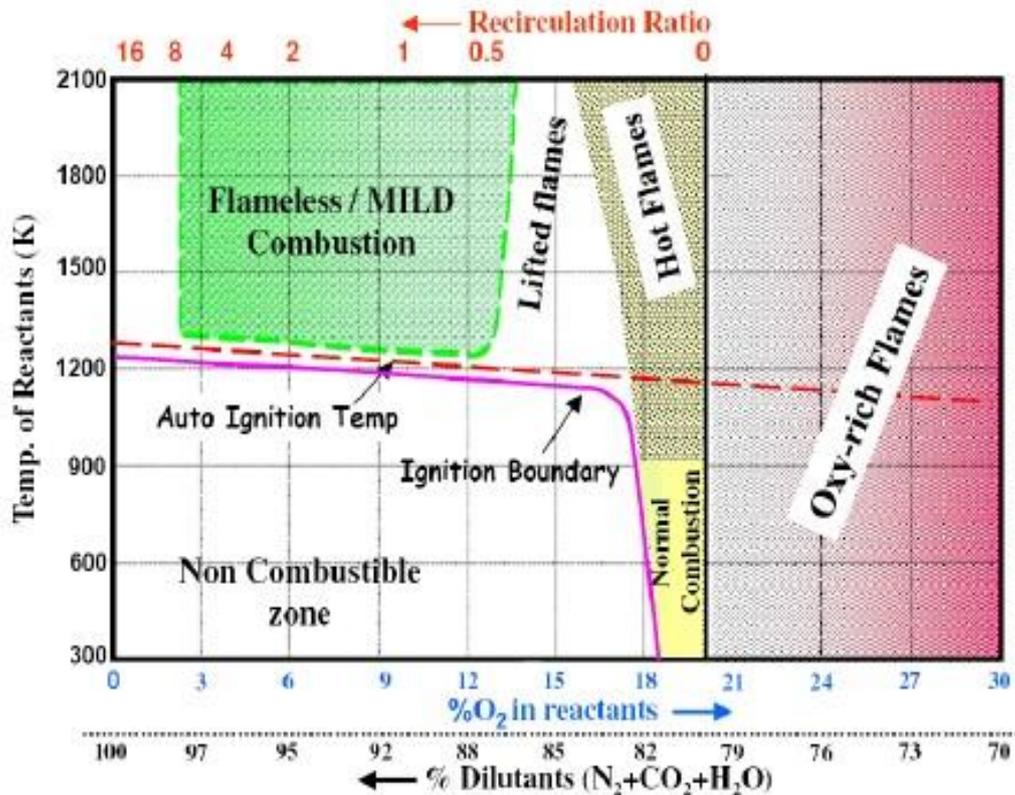


Figure 1. Schematic regime diagram for methane-air JHC flames (Rao, 2010).

The supply air needs to be heated by using a recuperator or regenerator to absorb waste heat from the flue gas. A recuperator can preheat the air to 1000K while the regenerator can heat the combustion air to about 1600K (Tsuji et al., 2003). It shows that there are four main regimes: a clean MILD combustion region, where MILD is

easily sustained without any significant emissions; an unstable flame region, where low-emission MILD conditions can be achieved by suitably selecting some key operating parameters, such as the combustion air temperature; a conventional (normal) flame combustion region and a no-combustion or extinction zone. The more usual representations (Cavigiolo et al., 2003 and Wüning and Wüning, 1997) identify different regimes of stable and unstable flame combustion and a flameless oxidation region. The oxygen concentration and the temperature of the air preheated will affect the MILD flame colour as shown in figure 2. The flame became green and generally less visible when the oxygen level decreased to 2%, (Gupta et al., 1999). When MILD combustion started, the furnace was bright and transparent (Wüning and Wüning, 1997, Tsuji et al., 2003 and Cavaliere and de Joannon, 2004).

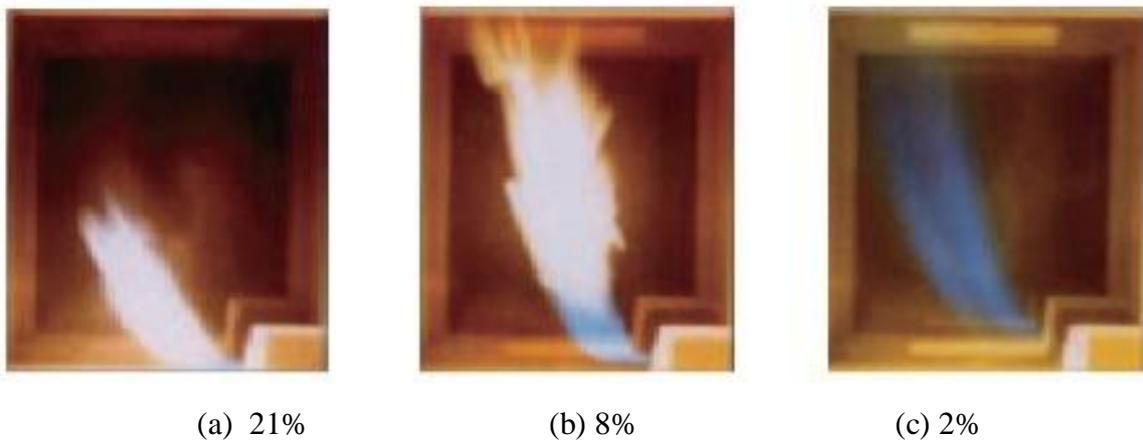


Figure 2. Combustion air temperature of 1100 °C and percentage of O₂ concentration (Gupta et al., 1999)

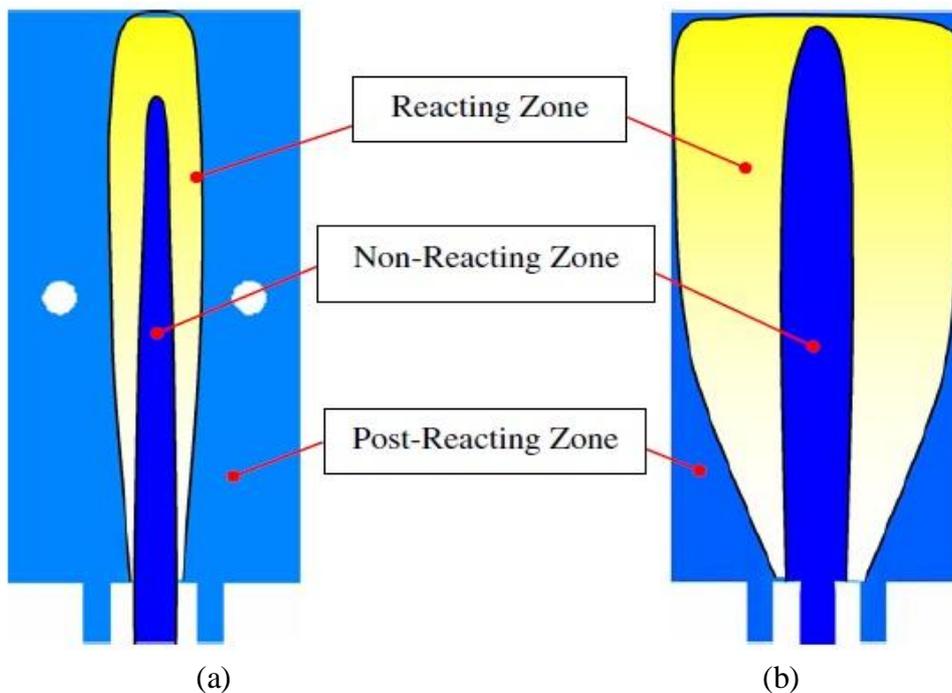


Figure 3. Closed furnace reacting zone for (a) conventional and (b) MILD combustion (Li and Mi, 2011)

Recently Parente et al. (2009, 2011b) studied the MILD combustion regime using a novel methodology based on Principal Component Analysis (PCA), investigates the main features for the characterisation. PCA can effectively identify low dimensional representations of the CH₄ / H₂ experimental dataset. Figure 3 illustrates the flame region for MILD and conventional combustion based on the [OH] contours. Significantly, both the reacting and non-reacting zones for the MILD case are bigger compared to the conventional case. The best combustion process is lean combustion. This is due to lean combustion use of less fuel and the impact is less cost of combustion. MILD lean combustion means that the combustion with less fuel and less oxygen level. In between the ratio of oxygen from 3 to 13%, auto ignition temperature is reducing with the increase of oxygen level.

COMBUSTION EFFICIENCY

Combustion efficiency is the ratio of the heat received by the target material to be heated (useful output) to the supply heat provided to the combustor (in the form of fuel or electricity supply). Industrial burners need a stable and efficient flame for an economical and safe heating process. In the industrial scale, diffusion or non-premixed combustion is commonly used due to its controllability and safety (Peters, 2000 and Tsuji et al., 2003). Bluff-body burners can offer a stable burner as required. There are many different shapes and geometries such as cone, cylinder, vee gutter, disk and sphere. The geometry will affect the recirculation zone (flame bluffing zone). Furnace lean and clean operation is very critical since two thirds of the plant's energy budget is allocated for the fuel cost (Thomas, 2011). Combustion thermal efficiency in the furnace can be improved by recycling the exhaust gases (Li et al. 2011a, 2011b).

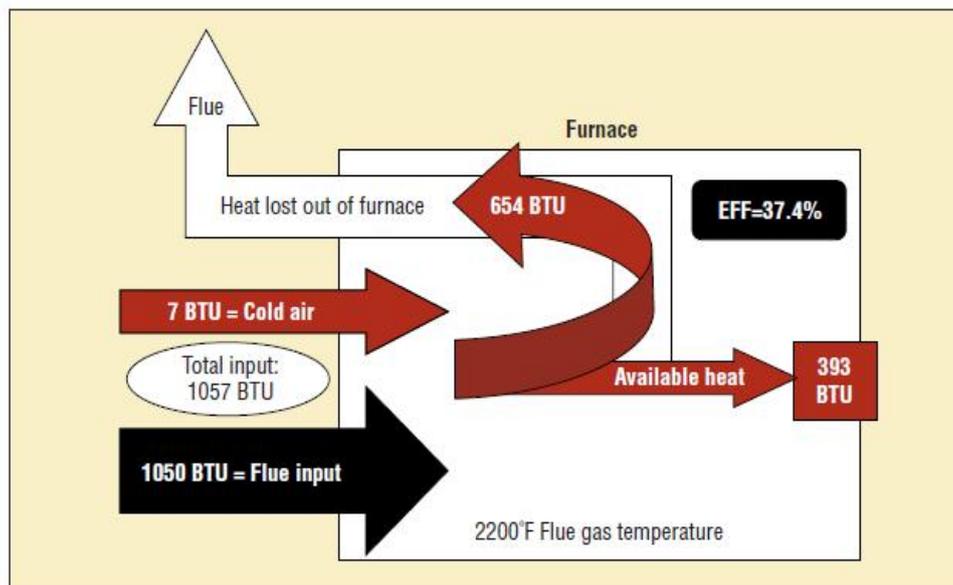


Figure 4. Efficiency of the heating system without EGR (Kraus and Barraclough, 2012).

MILD combustion has proved to produce clean and efficient combustion. Recent studies by Colorado et al. (2009) and Danon et al., (2010) on low calorific value fuels used in MILD combustion show that low NO_x emissions were achieved. The

fundamental parameters of MILD combustion are the average combustion chamber temperature (T_c), dilution ratio (K_V), and jet velocity (Derudi et al., 2007a). K_V is a key parameter for the MILD combustion operating conditions. Several other researchers (Wünning and Wünning, 1997, Katsuki and Hasegawa, 1998, Cavigiolo et al., 2003, Dally et al., 2008 and Galletti et al., 2009) defined K_V as the ratio between the recycled exhausts and the incoming air and fuel flow rates. MILD combustion has many advantages, such as producing very high thermal efficiencies and low emissions of NO_x . It produces a uniform temperature distribution, excellent combustion stability and has been considered as one of the new-generation, clean and efficient combustion technologies. It has great potential to be implemented in many industrial applications.

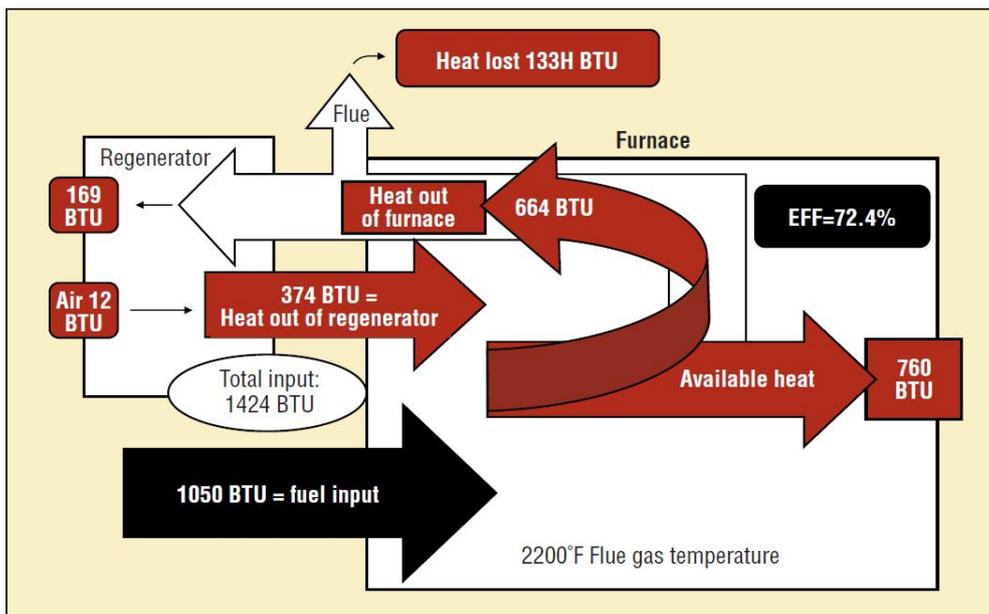


Figure 5. Efficiency of the heating system with EGR (Kraus and Barraclough, 2012).

The advantages of MILD combustion are implemented by the heating industries. Danon (2011) reported an increase in demand for expertise on the implementation of MILD combustion, especially for large-scale furnaces equipped with multiple burners. MILD combustion was achieved experimentally (Yuan and Naruse, 1999, Ertesvag and Magnussen, 2000, Weber et al., 2000, Özdemir and Peters, 2001, Hasegawa et al., 2002, Cabra et al., 2003, 2005, Rafidi and Blasiak, 2006, Sabia et al., 2007, Derudi et al., 2007a, 2007b, 2007c, Mörtberg et al., 2007, Kumar et al., 2007, Dally et al., 2008, Li and Mi, 2010, Mi et al., 2010, Zhenjun et al., 2010, Li et al., 2010a, 2010b, Oldenhof et al., 2010, 2011, Derudi and Rota, 2011 and Kraus and Barraclough, 2012) and numerically (Ertesvag and Magnussen, 2000, Coelho and Peters, 2001, Park et al., 2003, Cabra et al., 2003, 2005, Kim et al., 2005, Awosope et al., 2006, Kumar et al., 2007, Galletti et al., 2009, De et al., 2010, Frassoldati et al., 2010, Oldenhof et al., 2010, Zhenjun et al., 2010, Szegö, 2010, Parente et al., 2011a, 2011b and Kraus and Barraclough, 2012) in premixed, partially-premixed and non-premixed combustion modes. For the furnace combustion, simultaneous increase in radiant heat transfer and reduced NO_x emissions are possible with careful control of the fuel and air mixing (Mulliger and Jenkin, 2008). Nakamura et al. (1993) and Webber (2001) experimentally studied several pilot-scale furnaces equipped with heat exchangers. They demonstrated

that the port angles and locations will affect the heat transfer behaviour. The comparison of combustion with and without EGR can be seen in Figure 4 and 5. The furnace in Figure 4 is running without regenerator (EGR) and 654 BTU of heat lost through flue gas. The difference for Figure 5 is the furnace running with the regenerator (EGR) and from 654 BTU of heat in the flue gas; only 133 BTU is lost through flue gas to the atmosphere. Some 521 BTU of the heat is returned back to the system via the regenerator. The efficiency is 37.4% for the system without EGR and 72.4% for the system with EGR.

MILD RECENT TREND

The concept of MILD combustion has been extensively studied experimentally and numerically. However the challenge still remains to accurately model the MILD combustion regime due to the homogeneous mixing field effect by turbulence mixing and slower chemical reaction rates. MILD combustion is characterised by a strong relation between turbulence and chemistry, occurred at similar timescales (Plessing et al., 1998 and Galletti et al., 2007). The turbulence chemistry interactions should be treated with finite rate approaches. The non-premixed mode occurred when the fuel and preheated air are injected to the enclosure furnace through different ports and mixing and combustion proceed inside the chamber. Nathan et al. (1992) and Parham et al. (2000) reported that by controlling the mixing through their precessing gas jet, a simultaneous reduction in NO_x emissions by 30–50% and an increase in heat transfer by 2–10% were achieved. Szegö et al. (2008) used a furnace with 20kW supplied by the fuel and 3.3kW from the pre-heated air. This closed furnace used parallel air and fuel jets with one central air nozzle, four fuel jets and four exhausts. All the nozzles and exhausts were at the bottom of the furnace. This MILD combustion setup has produced data on various experiments including fuel tests, flame tests, NO_x tests, and heat exchanger tests (Maruta et al., 2000, Flamme, 2004, Park et al. (2004), Christo and Dally, 2004, 2005, Medwell et al., 2007, 2008, Mörtberg et al., 2006, Stankovic, 2006, Lou et al., 2007, Dally et al., 2002, 2004, 2008, 2010, Colorado et al., 2009, Mi et al., 2009, de Joannon et al. 2009, 2010, Li et al., 2011b, Oryani et al., 2011).

MILD combustion technology is still not fully commercialized and well adopted in furnace industry, thus it is very important to conduct substantial fundamental and applied research (Cavaliere et al., 2008, Li et al., 2011b, Parente et al., 2011a, 2011b and Danon, 2011). The fuel-air mixing in MILD combustion has become one of the interests of studies (Tsuji et al., 2003). Precise prediction of turbulent mixing is important in modelling turbulent combustion because it has a large effect on the flow field and turbulence–chemistry interaction (Shabanian et al., 2011). Galletti et al. (2007) claimed that the reactants' jet velocity and their angles are the main parameters affecting the quality of the air-fuel mixture. The characteristic of MILD combustion is strong coupling between turbulence and chemistry (Parente et al., 2008), occurring at similar timescales (Plessing et al., 1998 and Galletti et al., 2007) thus the turbulence-chemistry interactions should be treated with finite-rate approaches. The level of homogeneity of the mixing field (de Joannon et al., 2010) and slower reaction rates make the accurate modeling of this combustion regime challenging (Aminian et al., 2011), especially for the heat release rate and NO_x and soot formation, thus a fundamental study on the mixing quality is required. To achieve MILD combustion, the air supply has to be preheated (Wüning and Wüning, 1997). Many researchers claim

that regenerative heating or preheating is an important element in MILD combustion applications, which may add some complexity when retrofitting systems. However, a recent study by Li et al. (2011a, 2011b) showed that preheating is not required in the case of a closed furnace. The use of an open furnace operating in MILD combustion mode was investigated. Generally, the setup for open furnace is simpler and cheaper than closed furnace because the latter needs a thick and solid wall. However, open furnaces have additional complexity because of their requirement for preheating of the reactants. Oldenhof et al. (2011) claimed that studying flameless combustion in an open and unconfined setup might give valuable insights. The combination of open furnace and preheating as well as the effect of air-fuel mixing (Oldenhof et al., 2011) need to be fully addressed. It is believed that there is no reported data about MILD combustion in open furnace applications.

Biogas is an attractive alternative to replace the dependency on fossil fuels. Recently Colorado et al. (2009) studied MILD combustion using biogas (methane diluted with inert gases) and reported that NO_x and soot emissions were reduced but CO emission was increased. This was possibly due to the high fuel dilution and low coflow oxygen level. NO_x emission could be reduced effectively by means of low-oxygen concentration combustion (Suzukawa et al., 1997, Gupta, 2000 and Fuse et al., 2002). NO_x strongly depends on the mixing processes between fuel and air. The recirculation flue gases are entrained with combustion air and fuel before combustion occurs to depress higher peak temperature. As a result, thermal NO_x is suppressed. There are parameters to be measured to achieve the desired MILD combustion which are dilution ratio (K_V) and temperature inside the combustion chamber. The minimum dilution ratio to achieve MILD combustion is 2.5 (Wünning and Wünning, 1997). The MILD combustion key control strategies are the heating requirement by the furnace. Based on the heating requirement, the dilution ratio and fresh air supply was controlled by. EGR, fresh air and fuel supply are controlled based on the dilution ratio required. Fuel consumption is the key to measure the efficiency of the system. Thermocouples are used to measure the heat produced by the flame.

EXHAUST GAS RECIRCULATION

Thermal efficiency of furnace and other heating equipment, such as kilns, ovens and heaters are very critical issue. Large amount of the heat is wasted in the form of flue gases and small amount of wall loss, opening loss, store heat and cooling water loss. Exhaust gas recirculation (EGR) is one of the methods to recover these losses. EGR behaves differently to heat regenerators. EGR works by recirculating a portion of the exhaust gas back to the combustion chamber. The main purpose of EGR is that the oxygen in the combustion chamber will be diluted by the hot flue gas and the mixture heated directly. The volume of hot flue gas to be injected back into the system depends on the level of oxygen dilution needed. EGR with MILD combustion was used by Wünning and Wünning (1997), Katsuki and Hasegawa (1998) and Cavaliere and de Joannon, (2004) as a solution to avoid NO_x and soot formation. Wünning and Wünning (1997) calculated the dilution ratio K_V with EGR as:

$$K_V = \frac{M_E}{(M_F + M_A)} = \frac{(M_T - M_F - M_A)}{(M_F + M_A)} \quad (1)$$

The total mass flow rate (M_T) is calculated by adding up the EGR mass flow rate (M_E), fuel mass flow rate (M_F) and fresh air mass flow rate (M_A). The dilution ratio (K_v) and temperature inside the combustion chamber are to be measured when combustion achieve steady state. The minimum dilution ratio is 2.5 (Wüning and Wüning, 1997). The control strategy is the heating required by the furnace which will determine the required dilution ratio. The damper blade will act as a control valve at the furnace stack. The damper blade will use to control the outflow from the furnace and the percentage of the opening size will determine the percentage of the exhaust gas recirculation (EGR). The EGR and the fresh air mixing will determine the dilution ratio of the system. The total flue gas out of the system must be equal to the quantity of the fresh air and fuel supply. The research on utilising EGR to reduce the emission and increase the efficiency of the combustion extensively progress. EGR was reported giving effect on the reduction of the emission for the internal combustion engine (Abdullah et al., 2009, Mamat et al., 2009 and Yasin et al., 2011).

BIOGAS: LOW CALORIFIC VALUE GAS

Considering biogas with the standard methane content of 50%, the heating value is 21 MJ/Nm³, the density is 1.22 kg/Nm³ and the mass is similar to air at 1.29 kg/Nm³ (Al-Seadi et al., 2008). The use of gas is predicted to continue to replace coal for electricity generation as it is a cleaner fuel producing lower greenhouse gases. Coal usage is predicted to increase by 50%, whereas gas is expected to increase by 88% (Scragg, 2009). Biogas can be produced from the biodegradation of organic materials of biological origin (biomass) in anoxic environments, such as swamps, wetlands, sediments, and in the rumen of ruminant animals. Methane production in engineered anaerobic digestion (AD) systems has been employed for more than a century to treat municipal sludge generated by municipal wastewater treatment plants (WWTPs), beside renewable resources and reduce greenhouse gas emissions, biogas also benefit to the farmers. It will reduce biomass waste and digestate is an excellent fertiliser since its rich of nitrogen, phosphorus and potassium. Besides many advantages of biofuel and biogas, currently there are some debates on the sustainability of biofuel resources (RACQ, 2008) including the risk of food supply and shortage of biomass due to floods and other circumstances.

Methane is the main component of natural gas and biogas and is the most abundant organic compound on earth. Natural gas is a promising alternative fuel to meet strict combustion emission regulations in many countries. The combustion run on natural gas can operate at lean burn and stoichiometric conditions with different combustion and emission characteristics. Table 1 shows the differences in natural gas composition between some countries compiled by Hairuddin et al. (2010). Natural gas, methane or hydrogen is commonly used for industrial burners. Hydrogen is the most clean and very low emission in combustion. Hydrogen's low density giving a challenging medium for the storage (requires very high pressures tank). By adding hydrogen to the fuel blend, the influence of molecular diffusion will increase with increasing hydrogen (Mardani et al. 2010b). Recently Mardani et al. (2010a, 2010b) and Wang et al. (2011) investigated the effects of hydrogen addition and found that MILD combustion occurred more easily. Yu et al. (2010) found that pure hydrogen could not reduce thermal NO_x emission in the flameless combustion regime. Hydrogen properties show a lot of advantages over fossil fuels. Hydrogen is produced mainly from fossil fuel

resources and only 4% generated by electrolysis (Stoots, 2011). In the future, when fossil fuel depleted, the raw material will be changed to water and biomass (Hollinger and Bose, 2008). The purpose of the fuselage (enclosure) is to capture the flue gas to use as EGR. This configuration is not fully enclosed due to there being an opening at the top of the furnace. Therefore this setup is considered an open furnace.

Table 1. The difference in natural gas composition between some countries (Jonathan 2006, Kong & Reitz 2002, Olsson et al. 2002, Papagiannakis and Hountalas 2004).

Components	Volume (%)			
	Australia	Greece	Sweden	USA
Methane (CH ₄)	90.0	98.0	87.58	91.1
Ethane (C ₂ H ₆)	4.0	0.6	6.54	4.7
Propane (C ₃ H ₈)	1.7	0.2	3.12	1.7
Butane (C ₄ H ₁₀)	0.4	0.2	1.04	1.4
Pentane (C ₅ H ₁₂)	0.11	0.1	0.17	-
Hexane (C ₆ H ₁₄)	0.08	-	0.02	-
Heptane (C ₇ H ₁₆)	0.01	-	-	-
Carbon Dioxide (CO ₂)	2.7	0.1	0.31	0.5
Nitrogen (N ₂)	1.0	0.8	1.22	0.6

CFD MODELLING

The application of computer simulation techniques to improve combustion process has been rapidly expanding over the last decade. These techniques offer reliable predictions on the effect of various parameters on combustion performance. Moreover, the computational simulation frequently presents information on physical quantities that are quite difficult to measure. CFD is the tool to model the fluid flow problems numerically and reduce the excessive cost of experimental work. Galletti et al. (2007) reported that beside the experimental characterization of MILD combustion burners, the industry also shows the interest on CFD modeling. CFD may help in optimizing burners' performances such as injection nozzles and flue gas recirculation.

CFD alone is not fundamentally strong without validation of their result with the experimental work. MILD combustion in setups on many different scales has been extensively simulated using CFD software over the last decades (Danon, 2011). The configuration of reactants and exhaust ports was optimized using a CFD modeling study (Szegö, 2003). Mollica et al. (2009) using CFD to study the effect of preheating, further dilution provided by inner recirculation and of radiation model for a hydrogen-air MILD burner. Oryani et al, (2011) numerically analyse and comparing the flue gas recirculation (FGR) and fuel induced recirculation (FIR) conditions in the case of N₂, CO₂ and H₂O dilution and found that with small amounts of dilution, FIR is more effective in NO_x reduction. The established turbulent model in fluent was utilised. The continuous fluid flow and chemical reactions are simulated in a discretization mode. A mesh or numerical grid of the physical geometry for burner head and boundary wall are generated. The fluid flow and heat transfer transport equations, which are conservation of mass, momentum, heat and species, are solved. Recently Szegö et al (2011) using CFD to model MILD combustion in furnace and found that there is a strong coupling between the furnace aerodynamics and the reaction zone. CFD modelling is useful to

pre-determine the control parameters. Sensitivity to turbulence model (e.g. standard $k-\epsilon$ model (Launder and Sharma, 1974)) normally was investigated. The control parameters for the modelling works are temperature, velocity and the angle of the supply air; temperature, velocity and the angle of the fuel; percentage of EGR; location of the EGR input to supply air; burner head design and fuel properties.

Turbulent flow occurs at high Reynolds numbers and very complex process and even more complex when involve with combustion reaction or other chemical reaction. Tennekes and Lumley (1972) characterised the nature of the turbulence as irregularity, large Reynolds numbers, diffusivity, three-dimensional vorticity fluctuations and continuum phenomenon. In the combustion process, particle interactions are very important in the fuel and air mixing process: usage of mixing models is required to close the molecular diffusion term in the probability density function (PDF) transport (Pope, 1985):

$$\frac{\partial \rho P}{\partial t} + \frac{\partial \rho u_i P}{\partial x_i} + \frac{\partial \rho S_k P}{\partial \psi_k} = - \frac{\partial}{\partial x_i} [\rho \langle u_i'' | \psi \rangle P] + \frac{\partial}{\partial \psi_k} \left[\frac{1}{\rho} \langle \frac{\partial J_{i,k}}{\partial x_i} | \psi \rangle P \right] \quad (2)$$

Particle mixing is becoming more important to study for the mixing process. Recently Wandel (2011) has proposed a new turbulent mixing model which randomizes the interaction of the particles in a local manner. The proposed model was called SPDL or Stochastic Particle Diffusion Length (Wandel, 2011) model, which is based upon the practical localness of the random inter-particle distance (Noor et al, 2011). The configuration of reactants and exhaust ports was optimized using a CFD modelling study (Szegö et al., 2003, Khoshhal et al., 2011, Noor et al, 2012a, 2012b). Mollica et al. (2009) used CFD to study the hydrogen-air MILD burner. They reported about the effect of preheating, further dilution provided by inner recirculation and radiation model. Numerical method was utilised on the flue gas recirculation (FGR) and fuel induced recirculation (FIR) analysis (Oryani et al., 2011). In the small amounts of N_2 , CO_2 and H_2O dilution, FIR is more effective in NO_x reduction. Recently Szegö et al. (2011) used CFD to model MILD combustion in furnace and found that there is a strong coupling between the furnace aerodynamics and the reaction zone.

OPEN FURNACE

MILD Combustion in closed furnace was established for many years; however, many fundamentals still need further study and resolution. Open furnace combustion for MILD is still a new approach. Open furnace combustion needs the enclosed chamber to collect the flue gas and use it as EGR. The oxygen in the fresh air supply needs to be diluted and EGR must be used for this purpose. The concept of open furnace is due to the opening at the top of the furnace and the flue gas that is not used for EGR was released from this top opening. Figure 6 shows the open furnace (Noor et al, 2012a, 2012b) used to numerically study the MILD combustion. The opening on the top of the furnace chamber can be controlled and adjusted in order to control the amount of EGR and dilution ratio. The dilution ratio was controlled by the opening of the damper. The damper at the furnace stack was used to control the outflow from the furnace and the percentage of the opening size was determined by the percentage of the exhaust gas recirculate (EGR). The main purpose of EGR is to dilute fresh air with exhaust gas; and therefore will reduce the peak combustion temperature and pressure which will consequently reduce the amount of NO_x (Santoh et al., 1997, Abd-All et al., 2001,

Agarwal et al., 2006, Hountalas et al., 2008). The EGR and the fresh air mixing will determine the dilution ratio of the system.

The total flue gas emitted from the system must be equal to the quantity of fresh air supply. In order to capture the combustion image and the flame propagation, high speed camera was utilised in the early state of the combustion and establishment phase. When the flame reaches a steady state and invisible to the naked eye, the high speed camera will capture the flame luminescence (Oldenhof, et al., 2010, 2011). This process is important for the MILD combustion non premixed lifted flame. In normal jet flames, the lift-off height is the axial height of the sharp flame interface. To determine lift-off height, a certain threshold level for an averaged quantity is defined. Example using the quantities like temperature (Kumar et al., 2007), OH concentration (Cabra et al., 2003 and Ertesvag and Magnussen, 2000) or luminescence (Cabra et al., 2005) was proposed.

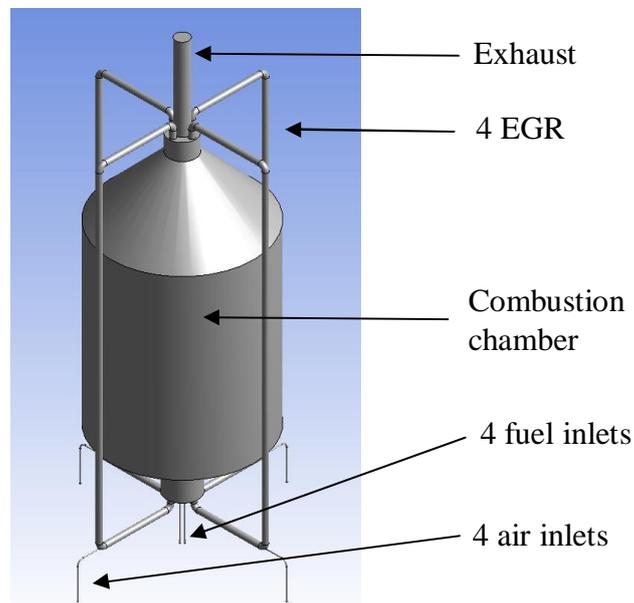


Figure 6. Open furnace with 4 EGR and top chamber opening.

Open furnace through the combination of the study parameters: preheating the reactants using EGR to dilute the oxygen in air supply, high reactant jet velocity, hydrogen additive to the biogas to reduce the mixture self ignition temperature and turbulent mixing of the reactant, optimisation of MILD combustion in an open furnace can be achieved. CFD was utilised to simulate the combustion with low calorific value gas call biogas. In this simulation, 50% of methane was mixed with 20% of hydrogen and 30% of carbon dioxide to form the low calorific value gas. The result for the combustion temperature and combustion radiation zone is shown in figure 7 and 8. The result from the simulation shows that MILD combustion can be achieved using an open furnace combustion with the enclosed chamber to capture and utilised flue gas as EGR.

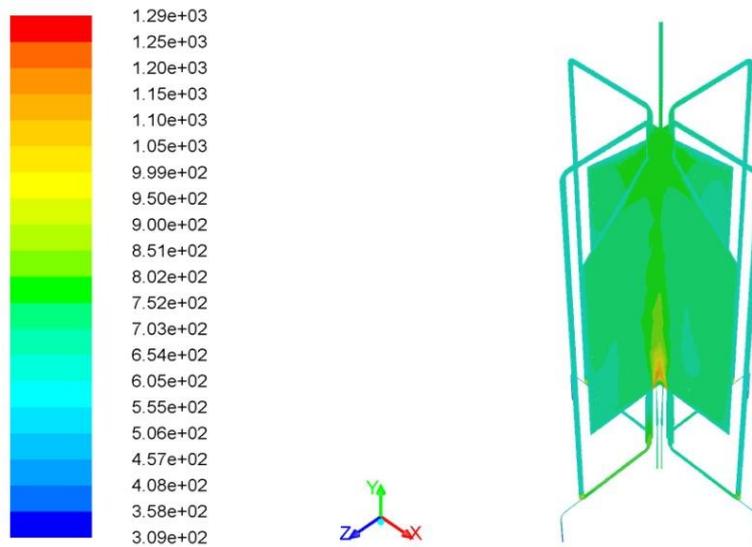


Figure 7. Combustion temperatures for low calorific value gas.

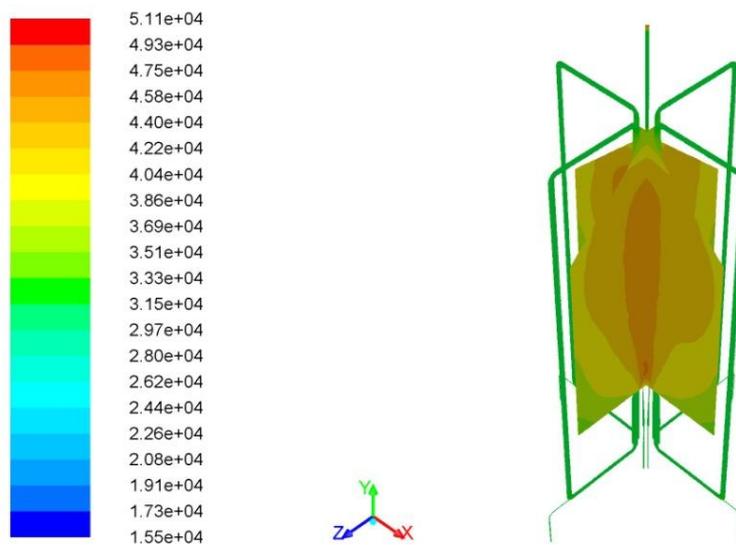


Figure 8. Combustion radiation zone.

CONCLUSION

The review of MILD combustion toward open furnace was discussed. MILD or flameless combustion produces higher efficiency with lower emissions. The MILD combustion provides many benefits to the furnace and burners in heating industries. Despite the benefits, the fundamental of the combustion is not properly well established and needs further research especially on the control parameters, combustion behaviour, combustion characteristics, exhaust gas recirculation and dilution required. Heating industries are still in early stages to adopt MILD or flameless technology to their burners. Most of the burners are still using conventional combustion technology since it is fundamentally stable, strong knowhow and relatively high experience. In January 2012 issue of Industrial Heating journal, Kraus and Barraclough discussed about the

utilisation of thermal regeneration for the industrial furnace is a must in order to increase the thermal efficiency of the burners. Biogas is one of the best alternatives for the fuel depletion issue. Fuel from bio resources is very environmental friendly since the cycle of CO₂ is properly closed. Hence the biogas with MILD combustion is the one of the best combustion for future energy and heating industries. CFD are good tools to simulate and predict the parameter before the experimental work take place. Simulations were the best option to reduce the experimental cost. Recent trend shows that MILD can be achieved by closed furnace. The dilution and preheating process happened internally in the closed combustion chamber. This will make the constructions of the combustion chamber simpler without external EGR needed but still closed furnace need thick wall. At this stage, there are no results of experimental or numerical records for open furnace MILD combustion. In this study, the open furnace with EGR to dilute and pre-heat the oxidant was numerically studied. MILD combustion was achieved for open MILD combustion. This result needs to be validated by an experimental technique.

ACKNOWLEDGMENTS

The authors would like to thank University of Southern Queensland (USQ), Ministry of Higher Education, Malaysia (MOHE) and Universiti Malaysia Pahang (UMP) for providing financial support and laboratory facilities. Main author also thanks to Hairuddin AA (UPM) for the comments and discussions.

REFERENCES

- Abd-Alla GH and Soliman HA, Badr OA and Abd-Rabbo MF, 2001 Effects of diluents and intake air temperature in exhaust gas recirculation of an indirect injection dual fuel engine, *Energy Conversion Mgmt* 42, 1033-1045.
- Abdullah NR, Mamat R, Tsolakis A, Wyszynski ML and Xu HM 2009 Optimization of High Injection Pressure and EGR on Engine Performance and Emissions using V6 Common Rail Diesel Engine, 9th Int. Conference on Engines and Vehicles. September 13-18, 2009 Capri, Naples, Italy, SAE 2009-24-0049
- Agarwal D, Sinha S and Agawal AK, 2006 Experimental investigation of control of Nox emissions in biodiesel – fuelled compression ignition engine, *Ren. Energy* 31:2356-2369.
- Al-Seadi T, Rutz, D, Prassl, H, Köttner, M, Finsterwalder, T, Volk, S and Janssen, R 2008 Biogas Handbook, Lemvigbiogas, University of Southern Denmark, Denmark.
- Aminian J, Galletti C, Shahhosseini S and Tognotti L 2011 Key modeling issues in prediction of minor species in diluted-preheated combustion conditions, *Appl Thermal Eng.* 31, 3287-3300
- Arghode, VK and Gupta, AK 2009 Effect of Confinement on Colorless Distributed Combustion for Gas Turbine Engines, 45th AIAA/ASME/SAE/ASEE Joint Propulsion Conference & Exhibit, Denver, Colorado
- Arghode VK and Gupta AK 2010a Effect of flow field for colorless distributed combustion (CDC) for gas turbine combustion, *Appl Energy*, 87(5), 1631–1640
- Arghode, VK and Gupta, AK 2010b Investigation of Distributed Combustion for Gas Turbine Application: Forward Flow Configuration, ASME Power Conf., Chicago, US

- Arghode VK and Gupta AK 2011a Investigation of forward flow distributed combustion for gas turbine application. *Appl Energy*, 88, 29–40
- Arghode VK and Gupta AK 2011b Development of high intensity CDC combustor for gas turbine engine, *Appl Energy*, 88, 963–73
- Awosope IO, Kandamby NH and Lockwood FC 2006 Flameless oxidation modelling on application to gas turbine combustors, *J Energy Inst*, 79(2), 75-83
- Cabra R, Chen JY, Dibble RW, Karpetis AN and Barlow RS 2005 Lifted methane–air jet flames in a vitiated coflow, *Combust. Flame*, 143 (4), 491-506
- Cabra R, Myhrvold T, Chen JY, Dibble RW, Karpetis AN and Barlow RS 2003 Simultaneous laser Raman–Rayleigh-lif measurements and numerical modeling results of a lifted turbulent H-2/N-2 jet flame in a vitiated coflow, *Proc. Combust. Inst.* 29, 1881–1888.
- Cavaliere A and Joannon DM 2004 MILD Combustion, *Prog Energy Comb Sc*, 30, 329-366
- Cavaliere A, de Joannon M and Ragucci R 2008 Highly Preheated Lean Combustion, in Dunn-Derek, D (ed.) *Lean Combustion: Technology and Control*, Elsevier, Oxford, UK. 55-94
- Cavigiolo A, Galbiati MA, Effuggi A, Gelosa D and Rota R. 2003 MILD combustion in a laboratory scale apparatus, *Combust. Sci. Technol*, 175, 1347-1367
- Christo FC and Dally BB. 2004 Application of Transport PDF Approach for Modelling MILD Combustion, 15th Australasian Fluid Mechanics Conf., 13-17Dec, University of Sydney, Australia
- Christo FC and Dally BB. 2005 Modeling turbulent reacting jets issuing into a hot and diluted coflow, *Combust Flame*, 142(1-2), 117–129
- Coelho PJ and Peters N 2001 Numerical simulation of a MILD combustion burner, *Combust Flame* 124 503-518
- Colorado AF, Medwell PR and Dally BB, 2009 LCV Fuels Emissions of Turbulent Nonpremixed Jet Flames under MILD Combustion Conditions, *Aust. Comb. Symposium (ACS) 2009*, 2-4Dec, University of Queensland, Australia
- Dally BB, Craig RA and Mi JC 2008 Dependence of flameless combustion on fuel-air injection pattern and their momentum ratio in a recuperative furnace, *Proc of the Ninth Asia-Pacific Int. Symposium on Combustion and Energy Utilization*, Wuhan, China
- Dally BB, Karpetis AN and Barlow RS 2002 Structure of turbulent non-premixed jet flames in a diluted hot coflow. *Proc Combust Inst*, 29(1) 1147–1154
- Dally BB, Riesmeier E, and Peters N 2004 Effect of fuel mixture on moderate and intense low oxygen dilution combustion. *Combust Flame*, 137(4), 418–431
- Dally BB, Shim SH, Craig RA, Ashman, PJ and Szego, GG 2010 On the burning of sawdust in a MILD combustion furnace, *Energy Fuels*, 24, 3462–3470
- Danon B 2011 Furnaces with multiple flameless combustion burners, *PhD Thesis*
- Danon B, de Jong W and Roekaerts DJEM 2010 Experimental and numerical investigation of a FLOX combustor firing low calorific value gases, *Combust. Sci. Technol.*, 182 (9) 1261-1278
- De A, Oldenhof E, Sathiah P and Roekaerts DJEM 2010 Numerical simulation of Delft-jet-in-hot-coflow (DJHC) flames using the Eddy dissipation concept model for turbulence-chemistry interaction, *Flow Turb Combust* doi:10.1007/s10494-011-9337-0
- Derudi M, Villani A and Rota R 2007a MILD combustion of industrial hydrogen-containing by-products, *Ind Eng Chem Res*, 10, 46(21), 6806-6811

- Derudi M, Villani A and Rota R 2007b The Influence of Hydrogen-Containing Fuels on MILD Combustion Sustainability, *Proc of the European Comb Meeting*, 11-13 Apr, Crete Greece
- Derudi M, Villani A, Rota R. 2007c Sustainability of mild combustion of hydrogen containing hybrid fuels, *Proc. Combust. Inst.* 31 3393-3400
- Derudi, M and Rota R, 2011 Experimental study of the mild combustion of liquid hydrocarbons, *Proc. Combust Inst.*, 33, 3325-3332
- Duwig C, Stankovic D, Fuchs L, Li G and Gutmark E. 2008 Experimental and numerical study of flameless combustion in a model gas turbine combustor, *Combust Sci Technol*, 180(2), 279–295
- Ertesvag IS and Magnussen BF 2000 The eddy dissipation turbulence energy cascade model, *Combust. Sci. Technol.* 159, 213-235
- Flamme M. 2004 New combustion systems for gas turbines, *Appl Therm Eng*, 24(11-12), 1551-59
- Frassoldati A, Sharma P, Cuoci A, Faravelli T and Ranzi E 2010 Kinetic and fluid dynamics modeling of methane/hydrogen jet flames in diluted coflow, *Appl. Thermal Eng.* 30 376-383
- Fuse R, Kobayashi H, Ju Y, Maruta K and Niioka T 2002 NO_x emission from high-temperature air/methane counter flow diffusion flame, *Int. J Thermal Sc*, 41, 693-698
- Galletti C, Parente A and Tognotti L. 2007 Numerical and experimental investigation of a MILD combustion burner, *Combust Flame*, 151(4), 649–664
- Galletti C, Parente A, Darudi M, Rota R and Tognotti L 2009 Numerical and experimental analysis of NO emissions from a lab-scale burner fed with hydrogen-enriched fuels and operating in MILD combustion, *Int. J Hyd Energy*, 34, 8339-8351
- Gupta AK 2000 flame characteristics and challenges with high temperature air combustion, 2000 Int. Joint Power Generation Conf. Miami Beach, Florida, July 23-26
- Gupta AK, Bolz S and Hasegawa T 1999 Effect of Air Preheat Temperature and Oxygen Concentration on Flame Structure and Emission, *J of Energy Resources Tech.* , 121, 209-216
- Hairuddin AA, Wandel AP and Yusaf T 2010, Hydrogen and Natural Gas Comparison in Diesel HCCI Engines - A Review, Southern Region Engineering Conference (SREC), Paper ID: SREC2010-F2-2, Toowoomba, Australia
- Hasegawa T, Mochida S, Gupta AK. 2002 Development of advanced industrial furnace using highly preheated air combustion, *J. Propul. Power* 18(2) 233-239
- Hollinger, T. and Bose, T. 2008, *Hydrogen Internal Combustion Engine*, Chapter 7a, in L'eon (ed.), *Hydrogen Technology*, Springer-Verlag, Berlin Heidelberg
- Hountalas DT and Mavropoulos GC and Binder KB 2008 Effect of exhaust gas recirculation (EGR) temperature for various EGR rates on heavy duty DI diesel performance and emissions, *Energy*, 33: 272-283.
- IEA, 2006 *World Energy Outlook (WEO)*, Int. Energy Agency, IEA, Paris
- IEA/OECD, 2009 *World Energy Outlook (WEO)*, Int. Energy Agency, IEA, Paris
- IEA/OECD, 2002 *CO₂ Emissions from Fuel Combustion: 1971–2000*, Organisation for Economic Cooperation and Development and Int. Energy Agency, Paris
- Joannon DM, Sabia P, Sorrentino G and Cavaliere A, 2009 Numerical study of MILD combustion in hot diluted diffusion ignition (HDDI) regime, *Proc Combust Inst*, 32(2), 3147–3154

- Joannon DM, Sabia P and Cavaliere A, 2010 *MILD combustion*, in *handbook of combustion*, 5, Lackner M, Winter F and Agarwal AK (ed), Wiley-Vch, Weinheim
- Jonathan, P 2006 Responses to questions on the design elements of a mandatory market-based GHG regulatory system, *World Resources Institute*, Washington
- Katsuki M and Hasegawa T 1998 The science and technology of combustion in highly preheated air, *Proc Combust Inst*, 27(2), 3135–3146
- Kim JP, Schnell U and Scheffknecht G 2008 Comparison of different global reaction mechanisms for MILD combustion of natural gas, *Comb Sci Technol*, 180(4), 565-592
- Kim SH, Huh KY and Dally BB 2005 CMC modeling of turbulent nonpremixed combustion in diluted hot coflow, *Proc. Combust. Inst.* 30 751-757
- Kong, SC & Reitz, RD 2002 Use of detailed chemical kinetics to study HCCI engine combustion with consideration of turbulent mixing effects, *Journal of Engineering for Gas Turbines and Power-Transactions of the ASME*, 124(3), 702-7.
- Khoshhal A, Rahimi M and Alsairafi AA 2011 Diluted Air Combustion and NO_x Emission in a HiTAC Furnace, *Num Heat Tr, Part A: Applications*, 59(8), 633-651
- Kraus BJ and Barraclough S 2012 New Configuration May Make it Harder to Say No to Thermal Regeneration, *Industrial heating*, Jan 2012, LXXX, No. 1, 24-27
- Kumar S, Paul PJ and Mukunda HS 2007 Prediction of flame liftoff height of diffusion/partially premixed jet flames and modeling of mild combustion burners, *Combust Sci. Technol* 179, 2219-2253
- Lauder BE and Sharma BI 1974 Application of the Energy Dissipation Model of Turbulence to the Calculation of Flow Near a Spinning Disc, *Letters in Heat and Mass Transfer*, 1(2), 131-138.
- Li M, Rao AD, Brouwer J and Scott SG 2010a Design of highly efficient coal based IGFC power plants. *J Power Sources*, 195(17), 5707–5718
- Li PF, Mi JC, Dally BB, Richard AC and Wang F. 2010b Effect of equivalence ratio and mixing pattern on flameless combustion. In, *Chinese Society of Engineering Thermophysics Conference*, Guang Zhou, Chinese Society of Eng. Thermophysics
- Li PF and Mi JC 2010 Critical Reynolds numbers for realization of MILD combustion in a recuperative furnace, *8th International Symposium on High Temperature Air Combustion and Classification*, Poznan, Poznan University of Technology Press
- Li PF and Mi JC 2011 Influence of Inlet Dilution of Reactants on Premixed Combustion in a Recuperative Furnace, *Flow Turbulence Combust*, 87, 617–638
- Li PF, Mi J, Dally, BB, Craig RA Wang PF 2011a, Premixed Moderate or Intense Low-Oxygen Dilution (MILD) Combustion from a Single Jet Burner in a Lab-Scale Furnace, *Energy Fuels*, 25, 2782-2793
- Li PF, Mi JC, Dally BB, Wang, FF, Wang, L, Liu, ZH, Chen, S and Zheng CG 2011b Progress and recent trend in MILD combustion, *Sci China Tech Sci*, 54, 255-269
- Lou B, Luo YH and Ma XQ 2007 Model and experimental validation on NO_x emission of biomass combustion in rotary kiln with HTAC. *Proc. CSEE*, 27(29), 68-73
- Mamat R, Abdullah NR, Xu HM, Wyszynski ML and Tsolakis A, 2009 Effect of Exhaust Gas Recirculation (EGR) with Multiple Injections on Combustion Pattern in a Common Rail Diesel Engine, 12th EAEC European Automotive Congress 2009, 29 June - 1 July, Bratislava, Slovak Republic.

- Maczulak A 2010 Renewable Energy, Sources & Methods, Facts on File Inc., NY, US
- Mancini M, Schwoppe P, Weber R and Orsino S. 2007 On mathematical modelling of flameless combustion, *Combust Flame*, 150(1-2), 54–59
- Mancini M, Weber R and Bollettini U. 2002 Predicting NO_x emissions of a burner operated in flameless oxidation mode. *Proc Combust Inst*, 29(1), 1155–1163
- Mardani A and Tabejamaat S, 2010a Effect of H₂ on hydrogenemethane turbulent non-premixed flame under MILD condition, *Int J Hydrog Energy*, 35, 11324-11331
- Mardani A, Tabejamaat S, Ghamari M. 2010b Num. study of influence of molecular diffusion in the MILD combustion regime, *Combust Theory Model*, 14, 747-774
- Maruta K, Muso K, Takeda K and Niioka T 2000 Reaction zone structure in flameless combustion, *Proc Combust Inst*, 28, 2117-2123
- Medwell PR, 2007 A laser diagnostic on MILD combustion, *PhD Thesis*, Adelaide
- Medwell PR, Kalt PAM and Dally BB. 2007 Simultaneous imaging of OH, formaldehyde, and temperature of turbulent nonpremixed jet flames in a heated and diluted coflow, *Combust Flame*, 148(1-2), 48–61
- Medwell PR, Kalt PAM and Dally BB. 2008 Imaging of diluted turbulent ethylene flames stabilized on a Jet in Hot Coflow burner, *Combust Flame*, 152(1-2) 100–113
- Merci, B., Naud, B. and Roekaerts, D., 2007 Impact of Turbulent Flow and Mean Mixture Fraction Results on Mixing Model Behaviour in Transported Scalar PDF Simulations of Turbulent Non-premixed Bluff Body Flames Flow, *Turbulence and Combustion*, 79, 41-53.
- Mi JC, Li PF and Zheng CG 2010 Numerical simulations of flameless premixed combustion in a recuperative furnace, *China J Chem Eng*, 18(1) 10–17
- Mi JC, Li PF, Dally BB, Wang FF, Wang L, Liu ZH, Chen S and Zheng CG 2009 Importance of initial momentum rate and air-fuel premixing on moderate or intense low oxygen dilution (MILD) combustion in a recuperative furnace, *Energy Fuels*, 23(11), 5349–5356.
- Milani A and Wüning JG 2007, Flameless oxidation technology, Adv. combustion and Aerothermal Technologies, *Environ Prot Pollut Reductions*, 6, 343-352
- Mollica E, Giacomazzi E and DI Marco A 2009 Numerical study of hydrogen MILD combustion, *Thermal Science*, 13(3), 59-67
- Mörtberg M, Blasiak W, and Gupta, AK 2006 Combustion of normal and low calorific fuels in high temperature and oxygen deficient environment, *Comb. Science and Tech.*, 178, 1345–1372
- Mortberg M, Blasiak W, Gupta AK. 2007 Experimental investigation of flow phenomena of a single fuel jet in cross-flow during highly preheated air combustion conditions, *J. Eng. Gas Turbines Power* 129 556-564
- Mullinger, P and Jenkins, B 2008 *Industrial and Process Furnaces: Principles, Design and Operation*, Elsevier, Oxford, UK
- Nakamura T, Smart JP and Van de Kamp, WL 1993 The effect of fuel air mixing on NO_x reduction and heat transfer in high temperature gas fired glass melting furnaces, in Combustion and Emissions Control , *Institute of Energy*, 213-230
- Nathan, GJ., Luxton, RE and Smart, JP 1992 Reduced NO_x emissions and enhanced large scale turbulence from a precessing jet burner, *24th Symposium (Int.) on Combustion*, Comb Institute, Sydney, Australia, 1399-1405
- Noor MM, Hairuddin, AA, Wandel AP and Yusaf, TF 2011a Implementation of Conditional Moment Closure using Taylor Expansion and Finite Different

- Method, *Int. Conf. of Mech. Eng. Research (ICMER) 2011*, 5-7 Dec, Malaysia, Paper ID:2011-151.
- Noor MM, Yusaf TF and Wandel AP 2011b Study of Random Particle Interactions for Analysis of Diffusion Lengths in Turbulent Combustion Modelling, *Aust. Combustion Symposium (ACS)*, 29Nov-1Dec, University of Newcastle, Australia, Paper ID:2011-36
- Noor, MM, Wandel, AP and Yusaf, TF, 2012a A Preliminary Study of Control Parameters for Open Furnace MILD Combustion using CFD, *Malaysian Postgraduate Conference (MPC) 2012*, 7-9 Jul, Bond University, Australia, Paper No.: MPC2012-16
- Noor, MM, Wandel, AP and Yusaf, TF, 2012b The Modelling of the Effect of Air Fuel Ratio on Unburned Hydrocarbons for MILD Combustion, *Malaysian Postgraduate Conference (MPC) 2012*, 7-9 Jul, Bond University, Australia, Paper No.: MPC2012-27
- Oldenhof E, Tummers MJ, van Veen EH, Roekaerts DJEM 2010 Ignition kernel formation and lift-off behaviour of jet-in-hot-coflow flames, *Comb. Flame*, 157(6), 1167-1178
- Oldenhof E, Tummers MJ, van Veen EH, Roekaerts DJEM 2011 Role of entrainment in the stabilisation of jet-in-hot-coflow flames, *Combust Flame*, 158, 1553-1563
- Olsson JO, Tunesta P, Johansson B, Fiveland SB, Agama R, Willi M and Assanis, DN 2002, Compression ratio influence on max load of a natural gas fuelled HCCI engine, *SAE Paper 02P-147*
- Orr F. 2005 *Energy and climate: challenges and solutions*, GCEP. Stanford University
- Oryani H, Khalilarya S, Jafarmadar S, Khatamnezhad H and Majidyfar S 2011 Numerical Investigation of Influence of Dilution in Air and Fuel Sides on MILD Combustion Burner, *Aust. J of Basic and Applied Sc*, 5(10), 272-279
- Özdemir IB, Peters N. 2001 Characteristics of the reaction zone in a combustor operating at mild combustion, *Exp. Fluids* 30 683-695
- Papagiannakis, RG and Hountalas, DT 2004, Combustion and exhaust emission characteristics of a dual fuel compression ignition engine operated with pilot Diesel fuel and natural gas, *Energy Conversion and Management*, 45(18-19), 2971-2987
- Parente A, Galletti C and Tognotti L 2008 Effect of the combustion model and kinetic mechanism on the MILD combustion in an industrial burner fed with hydrogen enriched fuels, *Int. J. Hydrogen Energy*, 33, 7553-7564
- Parente A, Galletti C and Tognotti L. 2011a A simplified approach for predicting NO formation in MILD combustion of CH₄/H₂ mixtures, *Proc. Comb Inst.* 33 3343-3350
- Parente A, Sutherland JC, Dally BB, Tognotti L and Smith PJ 2011b Investigation of the MILD combustion regime via Principal Component Analysis, *Proc Combust Inst*, 33, 3333-3341
- Parente, A, Sutherland JC, Dally, BB, Tognotti, L and Smith, PJ, 2009 Investigation of the MILD combustion regime via Principal Component Analysis, *Aust. Comb. Symposium (ACS)*, 2-4Dec, University of Queensland, Australia, Paper ID: 2009-21.
- Parham JJ, Nathan GJ, Smart JP, Hill SJ and Jenkins BG 2000 The relationship between heat flux and NO_x emissions in gas fired rotary kilns, *J. Inst. En*, 73, 25-34
- Park J, Choi JW, Kim SG, Kim KT, Keel SI and Noh DS 2004 Numerical study on steam-added mild combustion, *Int. J Energy Res*, 28, 1197-1212

- Park J, Hwang D, Choi J, Lee K, Keel S and Shim S. 2003 Chemical effects of CO₂ addition to oxidizer and fuel streams on flame structure in H₂/O₂ counter-flow diffusion flames, *Int. J. Energy Res.* 27 1205-1220
- Peters N 2000 Turbulent combustion, 1st edition, Cambridge University Press, UK
- Plessing T, Peters N and Wüning JG 1998 Laser optical investigation of highly preheated combustion with strong exhaust gas recirculation, *Proc Combust Inst*, 27(2), pp.3197-3204
- Pope SB 1985 PDF method for turbulent reactive flows, *Prog Energy Comb Sc*, 11(2), 119-192
- RACQ (Royal Automobile Club of Queensland) 2008 Biofuels: Suitability and Sustainability, *RACQ Public Policy Department*, Australia
- Rafidi N and Blasiak W. 2006 Heat transfer characteristics of HiTAC heating furnace using regenerative burners, *Appl. Thermal Eng.* 26, 2027-2034
- Rao, 2010, in Session on Lifted Flames in Hot Coflow Coordinator: Gordon R and Roekaerts D, *TNF 10 Workshop*, 29-31 July 2010, Tsinghua University Beijing, China
- Sabia P, de Joannon M, Fierro S, Tregrossi A, Cavaliere A. 2007 Hydrogen-enriched methane mild combustion in a well stirred reactor, *Exp. Therm. Fluid Sci.* 31 469-475
- Santoh K, Zhang L, Hatanaka H, Takatsuki, T and Yokoto, K, (1997). Relationship between NO_x and SM emissions from DI diesel engine with EGR Society of Automotive engineers of Japan 18: 369-375.
- Scragg, AH 2009 *Biofuels: Production, Application and Development*, CAB Int., UK
- Shabanian SR, Derudi M, Rahimi M, Frassoldati A, Cuoci A and Faravelli T 2011 Experimental and numerical analysis of syngas MILD combustion, *34th Italian Section Meeting*, Comb. Institute, Italy
- Smith ST and Fox RO 2007 A term-by-terms direct numerical simulation validation study of the multi environment conditional PDF model for turbulent reacting flows, *Phys Fluids*, 19, p. 085102.
- Stankovic D. 2006 Experimental study of flameless combustion in gas turbine combustors, *44th AIAA Aerospace Sciences Meeting and Exhibit*, Reno, America
- Stoots C, 2011 Electrolysis for Synthetic Fuel Production, Topsoe Catalysis Forum (TCF), 25-26 August, Munkerupgaard, Denmark
- Suzukawa Y, Sugiyama S, Hino Y, Ishioka M and Mori I 1997 Heat transfer improvement and NO_x reduction by highly preheated air combustion, *Energy Conversion and Management*, 38, 1061-1071
- Szegö, GG, 2010 Experiment and Numerical Investigation on a Parallel Jet MILD Combustion Burner System in a Laboratory Scale Furnace, *PhD Thesis*, University of Newcastle, Australia
- Szegö, GG, Dally BB and Christo FC, 2011 Investigation of the Mixing Patterns inside a MILD Comb. Furnace based on CFD Modelling, *Australia Combustion Symposium (ACS)*, 29Nov-1Dec, University of Newcastle, Australia, Paper ID:2011-28.
- Szegö, GG, Dally, BB and Nathan GJ 2008 Scaling of NO_x emissions from a laboratory-scale MILD combustion furnace, *Combustion Flame*, 154, 281–295
- Szegö, GG, Dally, BB, Nathan, GJ and Christo FC 2003 in: *Australian Symposium on Combustion and the 8th Australian Flame Days*, 8-9 Dec, Melbourne, Australia
- Tang Y, Wu J, Ma A, Gou X, Liu L and Wang E 2011 Effect of recirculated flue gas position on combustion and NO_x emission for high temperature air combustion,

- Int. Conf. on Computer Distributed Control and Intelligent Environmental Monitoring, IEEE, 1177-1180
- Tang ZG, Ma PY, Li YL, Tang CJ, Xing XJ and Lin QZ. 2010 Design and experiment research of a novel pulverized coal gasifier based on flameless oxidation technology, *Proc CSEE*, 30(8), 50–55
- Tennekes H & Lumley JL 1972, *A First Course in Turbulence*, MIT Press, US
- Thomas CE 2011 *Process Technology Equipment & Systems*, Delmar Cengage, Clifton Park, NY, US
- Tsuji H, Gupta A, Hasegawa T, Katsuki M, Kishimoto K and Morita M 2003 *High Temperature Air Combustion, From Energy Conservation to Pollution Reduction*, CRC Press, Boca Raton, Florida
- Wandel AP, 2011 A Stochastic Micromixing Model based on the Turbulent Diffusion Length Scale, *Aust. Comb. Symposium (ACS)*, 29Nov-1Dec, University of Newcastle, Australia, Paper ID: ACS2011-20.
- Wang F, Mi J, Li P, Zheng C. 2011 Diffusion flame of a CH₄/H₂ jet in hot low-oxygen coflow, *Int. J. Hydrogen Energy*, 36, 9267-9277
- Webber, R 2001 Combustion of natural gas, oil and coal with air preheated to temperatures in excess of 1000°C, *13th IFRF Members Conference*, paper 9, Noordwijkerhout, Netherlands
- Weber R, Orsino S, Lallemand N and Verlann A. 2000 Combustion of natural gas with high-temperature air and large quantities of flue gas, *Proc. Combust Ins* 28, 1315-1321
- Wüning J., 1991, Flammenlose Oxidation von Brennstoff mit hochvorgewärmter Luft, *Chem.-Ing.-Tech.* 63(12), 1243-1245
- Wüning J.G., 1996 Flammlose Oxidation von Brennstoff, *PhD Thesis*, Aachen
- Wüning JA and Wüning JG 1997 Flameless oxidation to reduce thermal no-formation, *Prog Energy Combust Science*, 23(1), 81-94
- Yasin MHM, Mamat R, Sharma KV and Abdullah AA, 2011 Effects of Exhaust Gas Recirculation (EGR) on a DI Diesel Engine operating with Palm Methyl Ester (PME), *Malaysian Technical Universities International Conference on Engineering & Technology (MUICET 2011)*, Johor
- Yu Y, Wang G, Lin Q, Ma C, Xing X 2010 Flameless combustion for hydrogen containing fuels, *Int. J Hydrogen Energy*, 35, 2694-2697
- Yuan JW and Naruse I. 1999 Effects of air dilution on highly preheated air combustion in a regenerative furnace, *Energy Fuels*, 13(1), 99–104
- Zhenjun C, Tong Z and Chaohua J, 2010 Thermal and Emission Characteristics of High Temp. Air Comb.: A Technical Review, *IEEE*, doi:978-1-4244-7739-5/10/\$26.00
- Zieba M, Brink A, Schuster A, Hupa M and Scheffknecht 2010 Ammonia chemistry in a flameless jet, *Combust Flame*, 156(10), 1950–1956

Nomenclature

CCS	Carbon capture and storage
CFD	Computational fluid dynamics
CMC	Conditional moment closure
CO	Carbon monoxide
CO ₂	Carbon dioxide
FGR	Flue gas recirculation
GHG	Greenhouse-gas
HC	Hydrocarbon
HiTAC	High temperature air combustion
HTOC	High temperature combustion
JHC	Jet in hot coflow
LCV	Low calorific value
MILD	Moderate or intense low O ₂ dilution
NO _x	Nitrogen Oxides
OH	Hydroxyl
PDF	Probability density function
SO _x	Sulphur Oxides
SPDL	Stochastic particle diffusion length
UHC	Unburned hydrocarbons

Symbols

B	Diffusion coefficient
K_T	Total number of particles
\bar{W}	Mean molecular weight of mixture
W_I	Molecular weight of species I
\dot{q}	Heat release rate
N	Total number of species
P	Favre joint PDF of composition
P_b	Position of particle
R	Gas constant

R_d	Internal dilution ratio
T	Temperature
T_c	Chamber temperature
V	Volume
K_v	Dilution ratio
Y	Mass fraction
Z	Mixture fraction
d	Constant
k	Turbulence kinetic energy
m_{in}	Mass flow rate
t	Time
u	Velocity
v	Specific volume
w	Importance weight

Greek Symbols

u_i	Favre mean fluid velocity vector
δt	Time interval
S_k	Reaction rate for species k
ε	Dissipation rate
ψ_k	Composition space vector for specie k
u_i''	Fluid velocity fluctuation vector
$J_{i,k}$	Molecular diffusion flux vector
ν	Kinematic viscosity
ξ	Reference variable
ρ	Density or mean fluid density
\emptyset	Composition of particle
$\dot{\omega}$	Chemical reaction rate
β	Index of composition variable
α	Model parameter